

A Review of Current Knowledge

**WORLD WATER:
RESOURCES, USAGE
AND THE ROLE OF
MAN-MADE RESERVOIRS**

FR/R0012

Revised March 2010

**(First Published April 2005 with the
title *World Water Storage in Man-
Made Reservoirs*)**

© **Foundation for Water Research**

Price: £15.00

(20% discount to FWRMembers)

**Foundation for Water Research
Allen House, The Listons,
Liston Road, Marlow,
Bucks SL7 1FD, U.K.**

Tele: +44(0)1628 891589

Fax: +44(0)1628 472711

E-mail: office@fwr.org.uk

Home page: www.fwr.org

TECHNICAL ENQUIRIES

**Any enquiries relating to this
Report should be addressed to:-**

**Dr W R White
Foundation for Water Research**

Review of Current Knowledge

This review is one of a series of Reviews Of Current Knowledge (ROCKs)' produced by FWR. They focus on topics related to water supply, wastewater disposal and water environments, which may be the subject of debate and inquiry, The objective of each review is to produce concise, independent scientific and technical information on the subject to facilitate a wider understanding of the issues involved and to promote informed opinion about them.

© Foundation for Water Research 2010

The contents of this report are the copyright of the Foundation for Water Research and all rights are reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, recording or otherwise, without the prior written consent of the copyright holders.

**WORLD WATER:
RESOURCES, USAGE AND THE ROLE OF
MAN-MADE RESERVOIRS**



Verzasca Dam, Switzerland

Author: Dr W R White

Review of Current Knowledge

Contents

Text

Executive summary	6
1 Introduction	11
2 Fresh water resources	14
3 Water usage	20
4 Population	24
5 Existing fresh water storage in reservoirs	26
6 Loss of storage due to sedimentation	31
7 Conservation of reservoir storage	33
8 Global warming and climate change	39
9 Future needs for reservoir storage	50
References	57
Appendix	59

Tables

1 Water resources and reservoir storage	16
2a Countries where 75% to 100% of water resources are generated externally	17
2b Countries where 50% to 75% of water resources are generated externally	17
3a Countries with reservoir storage in excess of half their actual renewable water resources per year	17
3b Countries with reservoir storage less than 1% of their actual renewable water resources per year	18
4 Water usage by region	20
5a Countries where water usage per person per year is less than 50 m ³ .	21
5b Countries where water usage per person per year is greater than 1000 m ³ .	21
6 Countries with less than 1 700 m ³ /person/year of fresh water	22
7a Countries where water usage is between 50% and 75% of actual renewable water resources	22
7b Countries where water usage is between 75% and 100% of actual renewable water resources	22
7c Countries where water usage is greater than 100% of actual renewable water resources	22
8 The ten most populous countries in 2009 and 2050	24
9 Highest capacity reservoirs	28
10 Regional distribution of reservoir sedimentation	32
11 Carbon dioxide emissions by country	43

Review of Current Knowledge

12	Climatic changes since 1900 as related to human activities	44
13	Projected greenhouse gas emissions as influenced by development paths	46
14	Projected global increases in temperatures and sea levels to the year 2100	46
15	Projected impacts of climate change to the year 2100	47
16	Projected regional changes in the annual run-off to 2100	48
17	Some regional parameters relating to reservoir storage requirements	54
18	Regional needs for fresh water storage	55

Figures

1	Distribution of water usage by sector in each region of the world	23
2	World population growth projection	24
3	Regional distribution of population growth 1950 to 2050	25
4	Dam distribution by purpose	27
5	Reservoir storage by region	28
6	Development of worldwide reservoir storage since 1900	29
7	Development of reservoir storage in the UK since 1900	30
8	Worldwide greenhouse gas emissions from 1970 to 2004	42
9	Worldwide greenhouse gas emissions from 1970 to 2004 by sector	42
10	Projections and model consistency of relative changes in run-off by 2100	48
11	Global growth rate for new storage	51
12	Future trends in reservoir storage	52
13	Future regional trends in reservoir storage	53

Review of Current Knowledge

Executive Summary

Introduction (Chapter 1)

This updated ROCK is concerned with the global availability and usage of fresh water and the role of man-made reservoirs in providing storage of this essential human resource. Man-made reservoirs play a particularly important role where natural precipitation is erratic or seasonal because they store water during wet periods to make it available during dry periods.

The ROCK was first produced in 2005 with the title *World Water Storage in Man-Made Reservoirs*. It was based on various sources of data relating to conditions between 1998 to 2003. This updated version of the ROCK utilises a) more recent data on population, water resources and reservoir storage where available and b) current evidence on global warming and climate change which may affect our perception of future water resources and storage needs.

In this ROCK eight regions of the world are identified and the countries considered to be in each region are listed in the appendix.

Fresh water resources (Chapter 2)

The United Nations characterizes countries with limited availability of fresh water as water stressed or water scarce depending on the amount of renewable water resources available. It is suggested that water stressed and water scarce countries are those which have less than 1 700 m³ and 1 000 m³ of water available per person per year respectively.

On a worldwide basis the amount of fresh water available is approx. 8 300 m³ per person per year. However, neither the population nor the availability of fresh water is uniformly spread across the globe. Some regions are clearly better off than others.

The Middle East and North African region is the one with the least available fresh water at approx. 1 400 m³ per person per year.

Water usage (Chapter 3)

Water is used for agricultural, industrial, domestic and other purposes. The actual usage in any particular country or region thus depends on the nature of the economy. Additionally there are climatological factors which vary across the globe.

On a worldwide basis the usage for all purposes is estimated at approx. 550 m³ per

Review of Current Knowledge

person per year. On a regional basis Sub-Saharan Africa uses least water per person, approx. 150m^3 per person. In North America the usage is approx. $1\,000\text{m}^3$ per person per year and in Oceania and the Middle East and North Africa the figure is approx. 800m^3 per person per year.

Population (Chapter 4)

In 2010 the world population will be approx. 7.0 billion. It is projected to rise to approx. 9.5 billion by 2050. Projections beyond 2050 are more difficult to make and depend upon the assumptions made regarding the development of the nature of the world economies.

Existing fresh water storage in reservoirs (Chapter 5)

The data supplied by ICOLD in their 2003 version of the *World Register of Dams* updates the information given in the earlier 1998 version. However, it is difficult to compare the two publications because the quality and quantity of the data supplied by their member countries is not consistent between the two. Many 2003 submissions, particularly those from the United States and from China, include dams which were not included in the 1998 version but were clearly in existence at that time.

The 2003 register reports a total worldwide reservoir capacity of $6\,700\text{km}^3$, an apparent increase of 700km^3 from 1998.

Reservoir capacity, region by region, and also the ratio of the reservoir capacity to the annually available water resources are given in this chapter.

Loss of storage due to sedimentation (Chapter 6)

With a current world storage in reservoirs (2003) of around $6\,700\text{km}^3$ and an average annual sedimentation rate of 0.5% the current annual loss of storage due to sedimentation is 33.5km^3 . This loss of storage due to sedimentation is one of the factors which needs to be taken into account in any discussion of future storage needs.

Conservation of reservoir storage (Chapter 7)

In the twenty first century conservation of reservoir storage will be essential because of a) the increasing land take of reservoirs and b) the diminishing availability of suitable, environmentally acceptable and economically viable sites. Sediment management will become crucial.

Two recent studies are quoted extensively in this ROCK, one by the World Bank and the other by the World Commission on Dams.

Review of Current Knowledge

The World Bank has made a contribution to promote conservation of water storage assets worldwide. This work concentrated on the specific issue of reservoir sedimentation and how it might be reduced, or in some very favourable conditions eliminated. The work developed the concept of “reservoir life cycle management” and looked at the physical processes by which sediment could be removed, on a regular basis, from reservoirs.

The World Commission on Dams carried out an extensive series of studies. Whilst acknowledging the contribution made by storage reservoirs, the overwhelming emphasis was on the social and environmental impacts of large reservoirs and how decision-making could be improved in future developments.

Global warming and climate change (Chapter 8)

An enormous amount of scientific effort has been invested in the subjects of global warming and climate change in recent years. Extensive field measurements over many years and the development of soundly based numerical models have placed the subject on a much firmer footing. No longer are claims of global warming simply based on anecdotal evidence of "rare" or "unusual" climatic events or sequences of such events. Despite this, there remains a small group of sceptics who, in particular, query whether current climate change trends are natural or man-made.

The Intergovernmental Panel for Climate Change (IPCC) was established by the United Nations Environmental Programme (UNEP) and the World Meteorological Organisation (WMO) in 1988 to provide a clear scientific view on the current state of climate change. It reviews and assesses the most recent scientific, technical and socio-economic information relevant to the understanding of climate change and collates scientific evidence from all over the world. Scientists contribute to the work of the IPCC on a voluntary basis and differing viewpoints existing within the scientific community are reflected in the IPCC reports.

Observed changes which show that the climate system has warmed significantly in the last 150 years include:-

- Average air temperatures up from 13.5 to 14.5 deg centigrade.
- Average sea levels up by 200 mm.
- Significant reductions in snow and ice cover.

The causes of climate change are identified as:-

- Changes in the atmospheric concentrations of greenhouse gasses.
- Changes in vegetative land cover.
- Changes in solar radiation.

Review of Current Knowledge

Estimates of historic greenhouse gases concentrations in the atmosphere have been made by various methods including ice cores going back many centuries and direct measurements in recent times. Carbon dioxide concentrations in the atmosphere for 10 000 years prior to 1800 were consistently in the range 260 to 280 ppm. However, since the start of the industrial era concentrations have risen continuously. They reached 310 ppm by 1950 and are currently approaching 380 ppm, a major escalation in the last 60 years

Many scientists around the world have developed numerical models to simulate the world's atmosphere. These models are capable of simulating changes in the atmosphere due to natural and also anthropogenic induced causes. The models have been validated against observed data going back to around 1900 and have been used to make predictions about future changes to the year 2100.

Broadly speaking the observed changes in the climate system over the past 150 years can only be simulated with reasonable accuracy if anthropogenic causes are included.

The IPCC uses several models to make predictions of future changes to the climate system. Its approach is to use various scenarios which consider alternative development pathways covering a range of demographic, economic and technological driving forces and resulting greenhouse gas emissions.

Details are presented by the IPCC of the scenario in which the world population stabilizes at the 2050 level, there is a rapid introduction of new and more efficient technologies and a balance between energy from fossil and non-fossil fuel sources. Effects are categorized under the headings:-

- Ecosystem
- Food
- Coasts
- Industry, settlement and society
- Water

Water is identified as of particular concern by the IPCC. Changes in run-off will affect the availability of water for domestic, industrial and agricultural purposes. Run-off is predicted with *high confidence* to increase significantly at higher latitudes and in some wet tropical areas, including populous areas in East and South East Asia. Significant reductions in run-off are predicted with *high confidence* for some dry regions at mid-latitudes due to reduced precipitation and increased evapo-transpiration. There is also *high confidence* that many semi-arid areas, such as the Mediterranean Basin, western United States, southern Africa and

Review of Current Knowledge

north-eastern Brazil, will suffer a decrease in water resources. Drought areas are predicted to increase in area.

Overall, the consequences of the anticipated changes to the hydrological cycle on humanity, brought about by climate change are:-

- An increased demand for irrigation water for food production, which is likely to translate into a demand for more storage reservoirs for fresh water.
- An increased demand for hydropower to enhance energy supplies from non-fossil related sources.
- A need to protect communities from flooding, whether caused by more severe storms in inland areas or the effects of sea level rise in coastal zones.

Future needs for reservoir storage (Chapter 9)

The continued development of fresh water storage on a worldwide basis is clearly important, not only because of the agricultural, domestic and industrial demands for fresh water but also because of the potential to provide non-fossil fuel related power.

In North America and Europe the stored water availability is likely, in general terms, to satisfy the needs of the population, certainly for the next 30 years or so. However there are likely to be shortfalls in water storage in South America, Asia and the Middle East and North Africa.

Crucial factors which will affect the magnitude of the problem will include:

- Population growth rates.
- Balancing technological, economic and environmental needs.
- Identification and availability of suitable reservoir sites.
- The effectiveness of measures to prolong reservoir life.

Review of Current Knowledge

1 Introduction

This ROCK is concerned with the global availability and usage of fresh water and the role of man-made reservoirs in providing storage of this essential human resource. Man-made reservoirs play a particularly important role where natural precipitation is erratic or seasonal because they store water during wet periods to make it available during dry periods.

The ROCK was first produced in 2005 with the title *World Water Storage in Man-Made Reservoirs*. It was based on various sources of data relating to conditions between 1998 to 2003. This updated version of the ROCK utilises a) more recent data on population, water resources and reservoir storage where available and b) current evidence on global warming and climate change which may affect our perception of future water resources and storage needs.

This updated ROCK provides a worldwide review using data available from numerous sources which are in the public domain:-

- Information on water resources and usage is collated on a worldwide basis by the Food and Agriculture Organisation of the United Nations (FAO). This updated ROCK uses the latest information from this source.
- Comprehensive information on population statistics is held by the United States Census Bureau and current information is available on-line.
- Much of the data on man-made reservoirs in the original ROCK was obtained from a publication by the International Commission on Large Dams (ICOLD) dated 1998. This new version of the ROCK uses ICOLD data published in 2003. The Commission is the world's leading professional organisation in the field of dams. It was formed in 1928 and currently has about 82 member countries and 10 000 individual members. It obtains information from both member and non-member countries on a regular basis using structured questionnaires.
- Global warming and climate change have now become headline issues and credible data on these subjects is now available, particularly through the Intergovernmental Panel for Climate Change (IPCC). Future water issues, including storage requirements and the location of such storage are discussed generally, in this edition of the ROCK, in the light of climate change projections.

Review of Current Knowledge

Data is not always consistent, nor is it presented in a uniform format. In particular, countries change their names and/or boundaries and the definition of which countries to group within particular regions has not been entirely consistent over the years. In this document eight regions are identified, namely

- Asia
- Europe
- Middle East and North Africa
- Sub-Saharan Africa
- North America
- Central America and Caribbean
- South America
- Oceania

The countries which are considered to be in each of these regions are listed in the appendix.

Man-made reservoirs are important because of their role in providing fresh water for irrigation (food supply) and also for domestic and industrial consumption. The dams associated with these reservoirs also make a significant contribution to energy supplies.

There are around 35 000 large reservoirs worldwide used for water supply, power generation, flood control, etc. Increasing populations and increasing consumption per capita mean that the demand for storage is rising inexorably, despite the increasing use of alternative sources and the more efficient use of water.

The benefits attributable to dams and reservoirs, most of which have been built since 1950, are considerable and stored water in reservoirs has improved the quality of life worldwide, see *White and Rofo*, 1996 (ref. 1) and *ICOLD*, 2007 (ref. 2). These benefits can be classified under three main headings: -

- **Irrigation:** About 20% of cultivated land worldwide is irrigated, some 300 million hectares. This irrigated land produces about 33% of the worldwide food supply. Irrigation accounts for about 75% of the world water consumption, far outweighing the domestic and industrial consumption of water.
- **Hydropower:** About 20% of the worldwide generation of electricity is attributable to hydroelectric schemes. This equates to about 7% of worldwide energy usage.
- **Flood control and storage:** Many dams have been built with flood control and storage as the main motivator eg the Hoover dam, the Tennessee Valley dams and some of the more recent dams in China including the Three Gorges dam.

Review of Current Knowledge

In many areas of the world the life span of reservoirs is determined by the rate of sedimentation which gradually reduces storage capacity and eventually destroys the ability to provide water and power. Many major reservoirs are approaching this stage in their life.

This ROCK reviews the world stock of reservoirs, considers the problem of sedimentation and possible measures to minimise the impact of sedimentation. But first, the contribution of reservoirs is put into context by considering overall water resources and water usage. Future demand for storage is considered in the light of the increasing world population and the need to provide extra water for domestic, industrial and agricultural purposes. Finally, the possible effects of global warming and climate change are considered with a view to establishing, in very general terms, regions where the provision of storage may become less or more important.



Bratsk Reservoir, Russia

Review of Current Knowledge

2 Fresh water resources

In discussing water resources and reservoir storage the quantities involved are very large indeed. It is convenient to quote volumes in cubic kilometres (km^3). One km^3 is equivalent to 10^9 cubic metres (m^3).

Fresh water resources represent but a small part of the total amount of water in the world. *ICOLD*, 2007 (ref. 2) suggests that the total amount of water is approximately 1 400 000 000 km^3 . 97.5% of this is saltwater, 2.5% is fresh water. However, not all of the fresh water is readily available to mankind. Most of it, nearly 70%, is tied up in the form of glaciers and snow cover in the Arctic and Antarctic regions. The residual fresh water resources are almost entirely to be found in groundwater. Lakes and river storage amount to only 0.3% of the total fresh water resources.

In this ROCK, fresh water means water which is not saline or brackish. It is derived from precipitation and occurs in glaciers, natural lakes, man-made reservoirs, rivers and groundwater. *The Food and Agriculture Organisation of the United Nations*, 2009 (ref. 3) provides information on fresh water resources. These are determined for each country by considering river flows, groundwater recharge and an estimated “overlap” between the two. In addition, the fresh water resources are considered in terms of those generated within the country being considered and those which enter or leave that country as a result of rivers which cross international boundaries.

The Food and Agriculture Organisation of the United Nations (FAO), uses the following definitions:-

Groundwater Recharge is the total volume of water entering sub-surface aquifers from precipitation and surface water flow. Groundwater resources are estimated by measuring rainfall in arid areas where rainfall is assumed to infiltrate into aquifers. Where data is available, groundwater resources in humid areas are considered as equivalent to the residual dry weather flow of rivers.

Surface Water Resources include the average annual flow of rivers generated from precipitation and base flow generated by aquifers. Surface water resources are usually computed by measuring or assessing total river flow occurring in a country on a yearly basis.

Overlap is the volume of water resources common to both surface and groundwater. It is subtracted when calculating IRWR (see below) to avoid double

Review of Current Knowledge

counting. Two types of exchanges create overlap: contribution of aquifers to surface flow, and recharge of aquifers by surface run-off. In humid, temperate or tropical regions, the entire volume of groundwater recharge typically contributes to surface water flow. In regions with porous limestone rock formations, a proportion of groundwater resources is assumed to contribute to surface water flow. In arid and semi-arid countries, surface water flows recharge groundwater by infiltrating through the soil during floods. This recharge is either directly measured or inferred by characteristics of the aquifers and groundwater levels.

Internal Renewable Water Resources, IRWR, is the sum of surface and groundwater resources minus overlap:- $IRWR = \text{Surface Water Resources} + \text{Groundwater Recharge} - \text{Overlap}$.

Natural Renewable Water Resources, NRWR, is the sum of internal renewable water resources and natural flow originating outside of the country. Natural Renewable Water Resources are computed by adding together both internal renewable water resources and natural flows (flow to and from other countries). Natural incoming flow is the average amount of water which would flow into the country without human influence.

Actual Renewable Water Resources, ARWR. In some arid and semi-arid countries, actual water resources are presented instead of natural renewable water resources. These actual totals include the quantity of flows reserved to upstream and downstream countries through formal and informal agreements or treaties. The actual flows are often much lower than natural flow due to water scarcity in arid and semi-arid regions.

Natural Renewable Water Resources per person are, in most cases, calculated by using national population data for 2006.

Man-made **Reservoir Storage** is achieved by constructing dams which impound fresh water. The amount of reservoir storage has been estimated using information from the International Commission on Large Dams (ICOLD). The quality and quantity of the data depends on the response from member countries. Details are available in *ICOLD*, 2003 (ref. 4). A regional summary is given in Table 1 whereas details are discussed in Chapter 5.

Table 1 gives a summary of water resources and reservoir storage region by region. The population data is for 2006 and the water resources data is for 2007. The reservoir storage data is for 2003. It has not been possible to obtain up-to-date synchronous data for all parameters. However, the population is changing far faster

Review of Current Knowledge

that any of the other parameters and the table is thus most relevant to the situation in 2006. The column in Table 1 showing the 2006 population figures also shows the percentage changes from the 2004 figures quoted in the earlier version of this ROCK. The final column in Table 1 is a measure of how much storage is available in each region compared with the actual annual renewable water resources.

Table 1 Water resources and reservoir storage

Region	Population (millions)	Internal renewable water resources [IRWR] (km ³ /year)	Actual renewable water resources [ARWR] (km ³ /year)	ARWR per person per year (m ³)	Total reservoir storage [TRS] (km ³)	TRS as % of annual ARWR (%)
Asia	3 685 (+3.1%)	11 117	14 510	3 938	1 299	9
Europe	728 (-0.1%)	6 589	7 763	10 663	1 199	48
Middle East & North Africa	444 (+2.1%)	512	625	1 408	385	62
Sub- Saharan Africa	783 (+9.7%)	3 872	5 437	6 944	580	11
North America	335 (+2.8%)	5 650	5 953	17 770	1 922	32
Central America & Caribbean	180 (+1.7%)	1 183	1 252	6 956	150	12
South America	378 (3.0%)	12 246	17 132	45 323	969	6
Oceania	32 (+3.2)	1 693	1 693	52 906	111	7
WORLD	6 565 (+3.4%)	42 862	54 798	8 281	6 616	12

There is more recent data on world population published by the *United States Census Bureau*, 2009 (ref. 5), and others but the breakdown by country and region differs from that used by the Food and Agricultural Organisation. Direct comparisons with water resources data are thus difficult. In October 2009 the world population was estimated to be around 6.8 billion. Future trends are discussed in Chapter 4.

Potential difficulties arise where individual countries are heavily dependent upon water resources which are generated externally and there are many international

Review of Current Knowledge

agreements in place aimed at defining water usage. Table 2 identifies those countries which are particularly dependent on externally generated water resources.

Table 2a Countries where 75% to 100% of water resources are generated externally

Asia	Azerbaijan* : Bangladesh : Pakistan : Turkmenistan : Uzbekistan*
Europe	Hungary : Moldova : Netherlands : Romania : Serbia
Middle East and North Africa	Egypt : Kuwait : Syria*
Sub-Saharan Africa	Botswana : Mauritania : Namibia* : Niger : Sudan*

* Countries where the more recent data suggests that reliance on external sources of water has increased in recent years.

Table 2b Countries where 50% to 75% of water resources are generated externally

Asia	Cambodia : Vietnam
Europe	Croatia : Latvia : Portugal : Slovakia : Ukraine
Middle East and North Africa	Iraq : Israel : Jordan
Sub-Saharan Africa	Benin : Chad : Congo : Eritrea : Gambia : Mozambique : Somalia

Countries which have reservoir storage of greater than half their actual renewable water resources per year are given in Table 3a.

Table 3a Countries with reservoir storage in excess of half their actual renewable water resources per year

Region	Country	Reservoir Storage as % of annual ARWR
Asia	Kyrgyzstan	111
	Tajikistan	150
Europe	Spain	51
Middle East and North Africa	Egypt	284
	Libya	57
	Morocco	56

Review of Current Knowledge

Region	Country	Reservoir Storage as % of annual ARWR
	Tunisia	90
	Turkey	51
Sub-Saharan Africa	Ghana	282
	Lesotho	97
	South Africa	62
	Zambia	86
	Zimbabwe	497

Those countries which have reservoir storage of less than 1 per cent of their actual renewable water resources are given in Table 3b.

Table 3b Countries with reservoir storage less than 1% of their actual renewable water resources per year

Region	Country	Reservoir storage as % of annual ARWR
Asia	Bangladesh	0.54
	Bhutan	0.00*
	Cambodia	0.05
	Mongolia	0.00*
	Myanmar	0.09
	Nepal	0.07
	Turkmenistan	0.00*
Europe	Belarus	0.00*
	Belgium	0.93
	Croatia	0.96
	Estonia	0.00*
	Hungary	0.45
	Slovenia	0.72
Middle East and North Africa	Israel	0.00*
	Kuwait	0.00*
	Oman	0.00*
	United Arab Republic	0.00*
	Yemen	0.00*
Sub-Saharan Africa	Burundi	0.00*
	Central African Republic	0.00*
	Chad	0.00*

Review of Current Knowledge

Region	Country	Reservoir storage as % of annual ARWR
	Congo	0.01
	Congo (DP)	0.61
	Equatorial Guinea	0.00*
	Eritrea	0.00*
	Gabon	0.13
	Gambia	0.00*
	Guinea	0.71
	Guinea Bissau	0.00*
	Liberia	0.00*
	Madagascar	0.20
	Mauritania	0.54
	Niger	0.00*
	Rwanda	0.00*
	Sierra Leone	0.01
	Somalia	0.00
	Togo	0.01
Uganda	0.30	
Central America and Caribbean	Belize	0.00*
	Guatemala	0.41
	Haiti	0.00*
	Nicaragua	0.41
South America	Bolivia	0.05
	Colombia	0.51
	Guyana	0.02
	Peru	0.27
Oceania	Fiji	0.46
	Papua New Guinea	0.04
	Solomon Islands	0.00*

*May be genuine indicators or may result from lack of information provided to FAO and/or ICOLD.

Review of Current Knowledge

3 Water usage

The Food and Agriculture Organisation, 2009 (ref. 3) lists water usage by country, sector and source. Sectors include agriculture, domestic and industrial usage. Sources include surface water, groundwater, desalinated water and treated waste water.

Water usage by region

Water usage by region is illustrated in Table 4.

Table 4 Water usage by region

Region	Total water usage (km³/year)	Total water usage per capita (m³/person)	Total water usage to Actual renewable water resources (%)
Asia	2 140	581	14.8
Europe	412	566	5.3
Middle East and North Africa	347	782	55.5
Sub-Saharan Africa	119	152	2.2
North America	332	991	5.6
Central America and Caribbean	101	561	8.1
South America	165	437	1.0
Oceania	26	813	1.5
WORLD	3 642	555	6.7

The region where water usage compared with the water availability is highest, is clearly the Middle East and North Africa, where water resources are limited and the population and the climate related usage per person are both relatively high.

For most of the world the water usage represents a small proportion of the available water resources. However, much of the available water cannot be used because it returns directly to the oceans during flood events. This is particularly true in monsoon areas where there is prolonged wet season. The arguments for storing a proportion of this fresh water are strong.

Review of Current Knowledge

Water usage by country

Within each region, water usage varies from country to country. A full analysis is not possible here but minimum and maximum water usage figures per person are identified in Table 5.

Table 5a Countries where water usage per person per year is less than 50 m³.

Sub-Saharan Africa	Angola : Benin : Burundi : CA Republic : Chad : Congo : Democratic Republic of Congo : Côte d'Ivoire : Gambia : Ghana : Lesotho : Liberia : Mozambique : Rwanda : Togo : Uganda
Oceania	Papua New Guinea

Table 5b Countries where water usage per person per year is greater than 1 000 m³.

Asia	Azerbaijan : Kazakhstan : Kyrgyzstan : Pakistan : Tajikistan : Turkmenistan : Uzbekistan
Europe	Bulgaria : Montenegro : Portugal : Romania : Serbia
Middle East and North Africa	Iran : Iraq
North America	Canada
South America	Ecuador : Guyana
Oceania	Australia

Water stress within individual countries is indicated by the *Food and Agricultural Organisation*, 2009 (ref.3).

One simple measure of water stress is the amount of water available per person. FAO suggests that any country with less than 1 700 m³/person/year suffers water stress. This is a simplified measure of water stress because it takes no account of the needs of the economy of particular countries for the industrial or agricultural water usage. FAO suggests a second threshold of less than 1 000 m³/person/year which is defined as water scarce. Table 6 lists those countries with less than 1 700 m³/person/year and suggests that more than 30 countries, with a total population of around 1.7 billion, are already water stressed. Of these countries, about half already fit into the water scarce category.

By 2025 the FAO predicts that the number of water stressed countries will approach 50 with a combined population of around 3 billion.

Review of Current Knowledge

Table 6 Countries with less than 1 700 m³/person/year of fresh water

Asia	India : South Korea : Pakistan : Singapore
Europe	Czech Republic : Denmark : Moldova : Poland
Middle East and North Africa	Algeria : Egypt : Israel : Jordan : Kuwait : Lebanon : Libya : Morocco : Oman : Saudi Arabia : Syria : Tunisia : United Arab Republic : Yemen
Sub-Saharan Africa	Burkino Faso : Burundi : Eritrea : Ethiopia : Kenya : Lesotho : Malawi : Rwanda : South Africa : Zimbabwe
Central America and Caribbean	Haiti

A second measure of water stress might be to look at the actual water usage and compare it with the actual available water resources country by country. A summary is given in Table 7.

Table 7a Countries where water usage is between 50% and 75% of actual renewable water resources

Asia	Tajikistan
Middle East and North Africa	Algeria : Iran : Iraq : Tunisia
Sub-Saharan Africa	Sudan

Table 7b Countries where water usage is between 75% and 100% of actual renewable water resources

Asia	Pakistan : Turkmenistan
Middle East and North Africa	Oman : Syria

Table 7c Countries where water usage is greater than 100% of actual renewable water resources

Asia	Uzbekistan
Middle East and North Africa	Egypt : Israel : Jordan : Kuwait : Libya : Saudi Arabia : United Arab Emirates : Yemen


Review of Current Knowledge

Water usage by sector

FAO, 2009 (ref. 3), provides data on the use of water in agriculture, municipalities and industry. On a worldwide basis the use of fresh water for agricultural purposes far outweighs other sectors. The data suggests 72.3% usage in agriculture, 9.4% by municipalities and 14.9% in industry. The remaining 3.4% is for other purposes, unspecified.

Usage of water by sector in the regions of the world is shown in Figure 1. Looking at the world as a whole, the Sub-Saharan Africa region uses the highest proportion of water for agricultural purposes. Europe uses the highest proportion in industry. North America uses the highest proportion in the home.

Figure 1 Distribution of water usage by sector in each region of the world

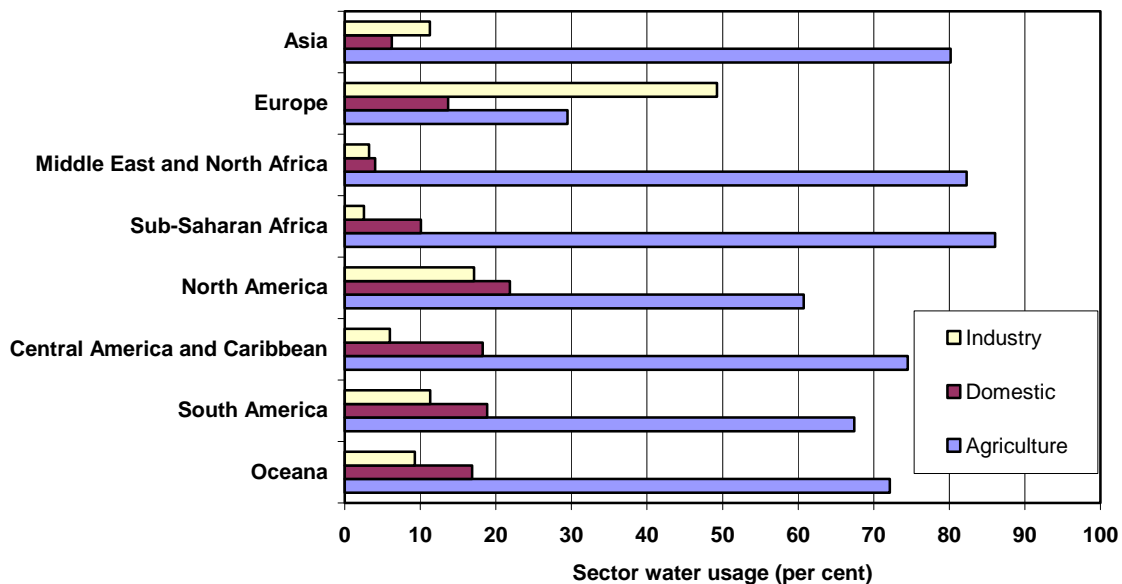


Review of Current Knowledge

4 Population

The current (2009) world population is around 6.8 billion. The current growth rate globally is around 1.2% per annum. Projections for mid 2025 and mid 2050 given in *USCB*, 2009 (ref. 5) are 8.1 billion and 9.4 billion respectively, see Figure 2.

Figure 2 World population growth projection

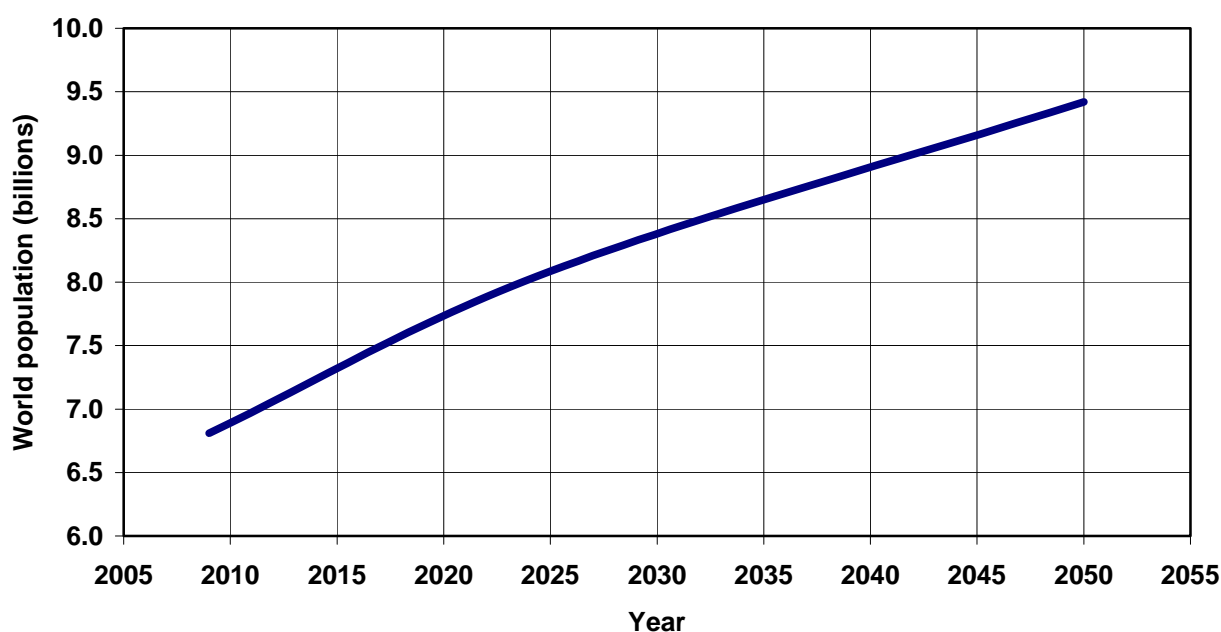

Projections suggest changes in the demographic distribution of the world population due to differing birth and mortality rates and migration from one region to another. This is illustrated in Table 8 by considering the most populous countries in 2009 and the projected listing for 2050. The percentage of the total world population is given in brackets.

Table 8 The ten most populous countries in 2009 and 2050


2009		2050	
Country	Population (millions)	Country	Population (millions)
China	1 331 (19.6%)	India	1 748 (18.6%)
India	1 171 (17.2%)	China	1 437 (15.3%)
United States	307 (4.5%)	United States	439 (4.7%)
Indonesia	243 (3.6%)	Indonesia	343 (3.6%)

Review of Current Knowledge

2009		2050	
Country	Population (millions)	Country	Population (millions)
Brazil	191 (2.8%)	Pakistan	335 (3.6%)
Pakistan	181 (2.7%)	Nigeria	285 (3.0%)
Bangladesh	162 (2.4%)	Bangladesh	222 (2.4%)
Nigeria	153 (2.3%)	Brazil	215 (2.3%)
Russia	142 (2.1%)	Congo Dem. Rep.	189 (2.0%)
Japan	128 (1.9%)	Philippines	150 (1.6%)

World population growth is predicted to be almost entirely concentrated in the world's less developed countries. Figure 3 shows the long term trends from 1950 to 2050.

Figure 3 Regional distribution of population growth 1950 to 2050

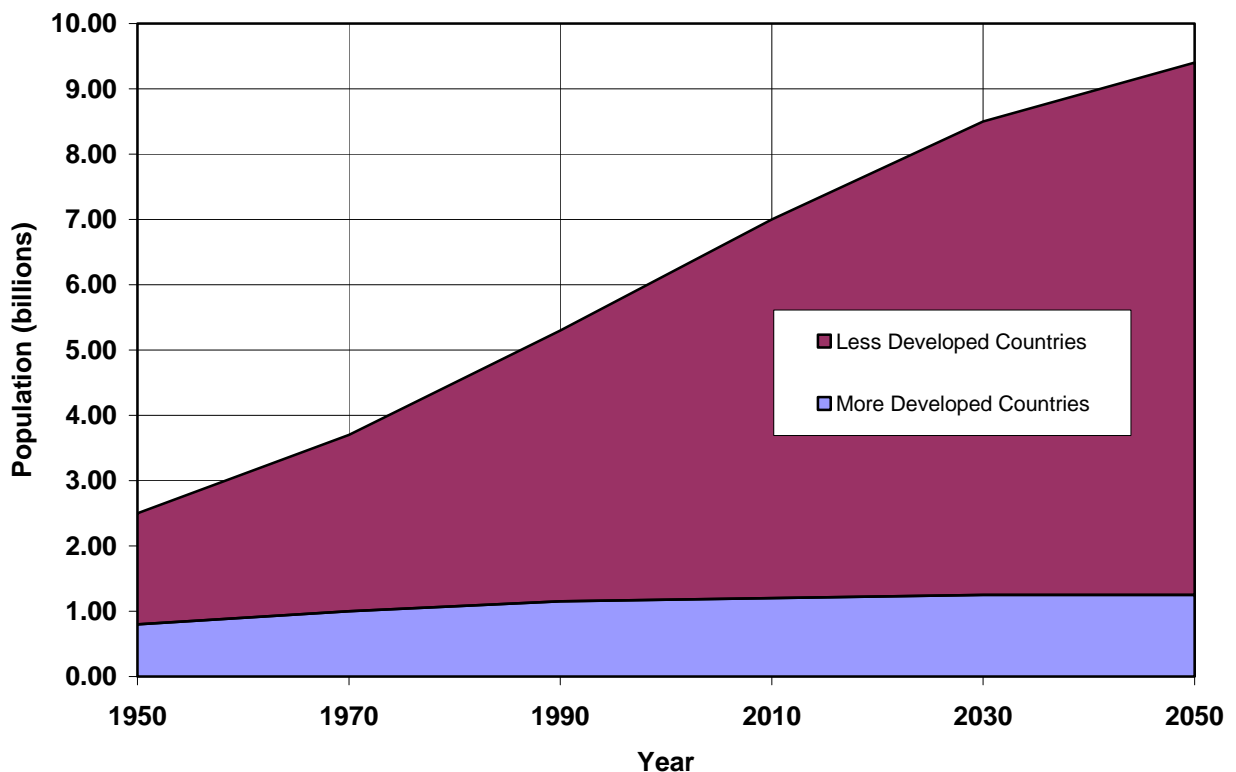

Review of Current Knowledge

5 Existing fresh water storage in reservoirs

World storage

The most recent ICOLD World Register of Dams, *ICOLD*, 2003 (ref. 4), was compiled from data collected from 82 Member and 58 Non-Member countries. It is available from ICOLD in book form and/or on CD.

ICOLD requested, in its circular instruction for reporting dam data, that respondents should include all dams with a height greater than 15 m.

The returns obtained by ICOLD had some limitations:-

- In spite of the transparency affirmed by ICOLD, some countries hesitated to provide comprehensive information for political or economic reasons.
- Some countries failed to respond and for these countries data was retained from earlier editions of the register.

The 2003 edition of the register has been expanded to include supplementary information relating to benefits and concerns about large dams. For each dam five new fields are introduced:-

- Installed capacity of power generators.
- Mean annual electrical energy generated.
- Irrigated areas.
- Flood storage capacity.
- Number of people affected by resettlement.

The 2003 register gives the total number of dams reported as 33 105, an increase of 7 695 from the 1998 register. This reflects reporting of increased numbers of existing dams rather than new dam construction, particularly by the United States and China.

The 2003 register records a total worldwide volume of storage as 6 700km³, an increase of 700km³ from the 1998 edition. Countries such as the United States and China have reported major increases in storage and this probably represents a correction to the overall data bank rather than a real increase. Numerous countries have reported a small decrease in storage in the last five years. Estimations or actual measurements of sedimentation within established reservoirs may provide an explanation for this.

On a worldwide basis the register indicates that dams provide:-

- 1 384 800 GWh of electrical energy annually
- Fresh water for 335 554 km² of irrigated land


Review of Current Knowledge

- 292 km³ of water stored for flood protection

The 2003 register provides a breakdown, on a worldwide basis, of the number and purpose of registered dams. The purpose is divided into seven categories: irrigation, hydropower, water supply, flood control, recreation, navigation and fish farming, and others (unspecified).

Dams are divided into two categories, single purpose and multi-purpose. Figure 4 shows the distribution of the number of dams which serve each purpose. This plot is in terms of the number of dams, not their capacity. It does not necessarily reflect the volumes of water used for each purpose.

Figure 4 Dam distribution by purpose

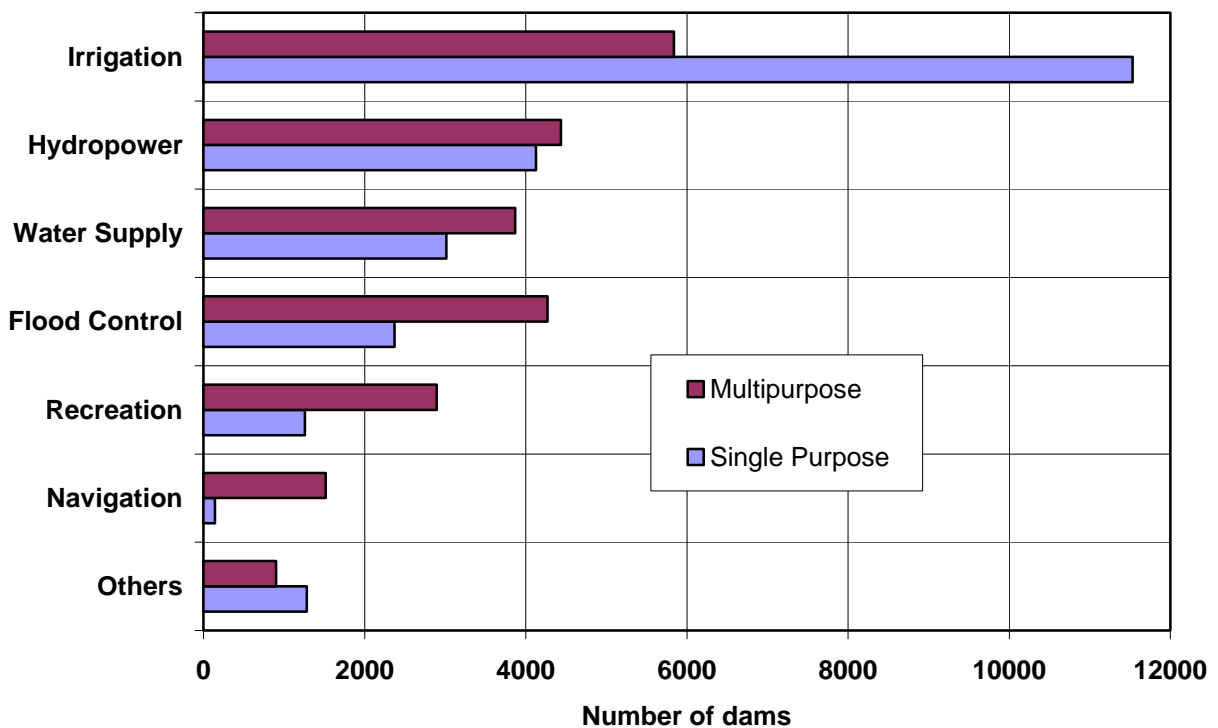


Review of Current Knowledge

Distribution of storage

The distribution of this storage, by reservoir volume, in each region is shown in Figure 5.

Figure 5 Reservoir storage by region

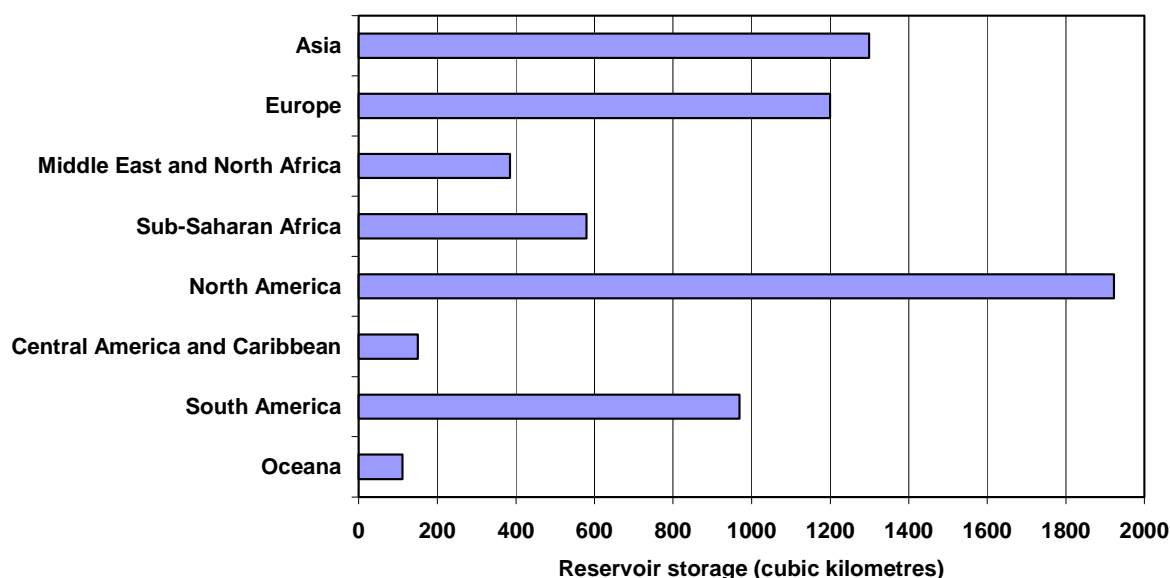

Reservoirs vary in size and capacity. There are six reservoirs with capacities greater than 100 km³. These are listed in Table 9.

Table 9 Highest capacity reservoirs


Dam / Reservoir	Capacity (km ³)	Purpose	Country
Kariba	181	Hydroelectricity	Zambia/Zimbabwe
Bratsk	169	Hydroelectricity Navigation Water Supply	Russia
High Aswan	162	Irrigation Hydroelectricity Flood Control	Egypt
Akosombo	150	Hydroelectricity	Ghana
Daniel Johnson	142	Hydroelectricity	Canada
Guri	135	Hydroelectricity	Venezuela

Review of Current Knowledge

The development of storage in man-made reservoirs in the 20th century is shown in Figure 6. Progress was slow until the mid 1950s when large projects began to come on stream. Dam building continued apace until the 1980s when the rate began to slow. That pattern continues today.

The reduced rate of increase of storage since the 1980s is likely to be due (i) to the economics of construction (the best and most economical sites have been exploited first) and (ii) the increased awareness of the need to consider the environmental impact of large dams.


Figure 6 Development of worldwide reservoir storage since 1900

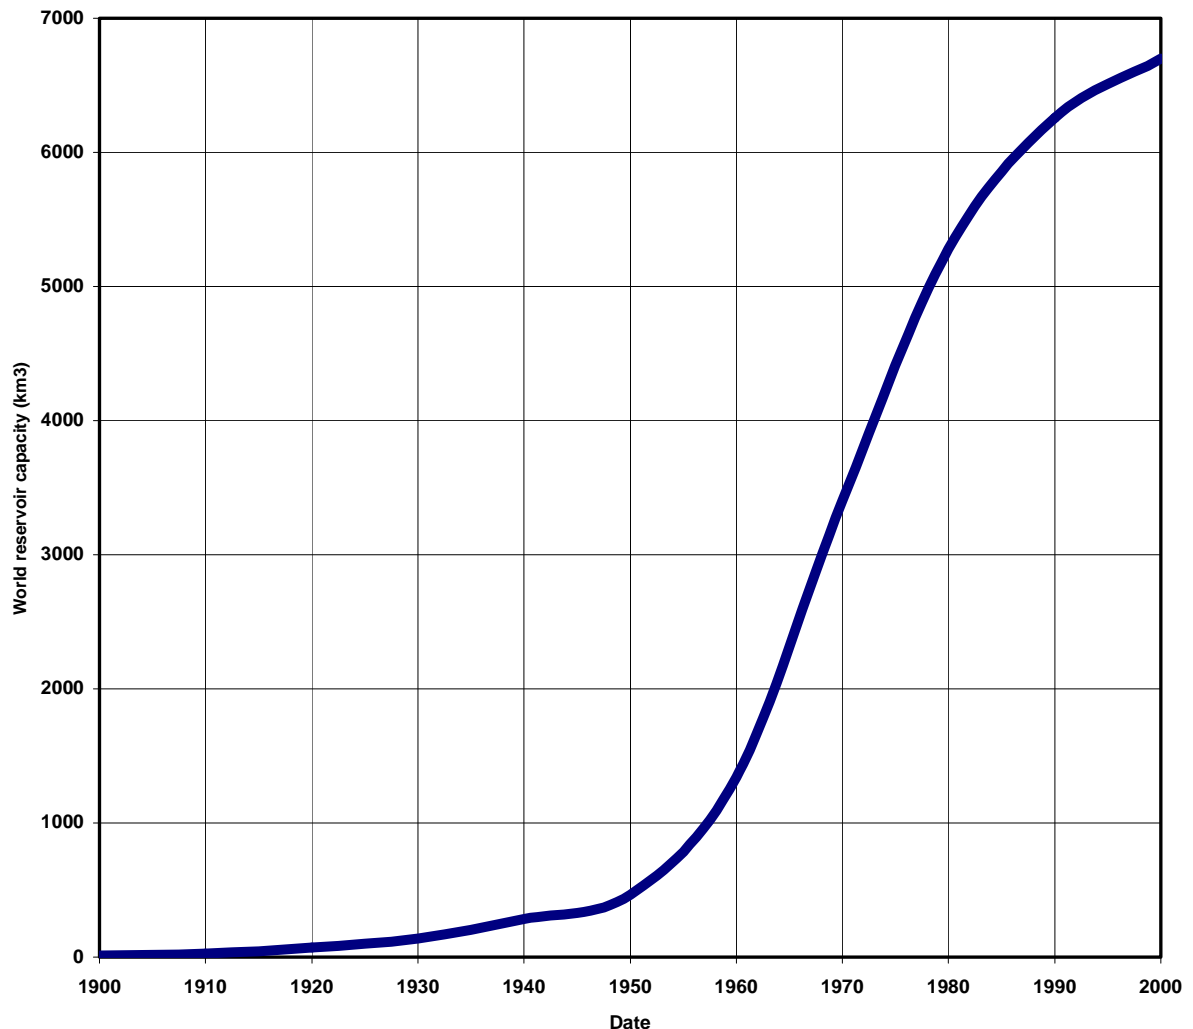

Review of Current Knowledge

The development of reservoir storage within the UK during the 20th century is shown in Figure 7.

Figure 7 Development of reservoir storage in the UK since 1900

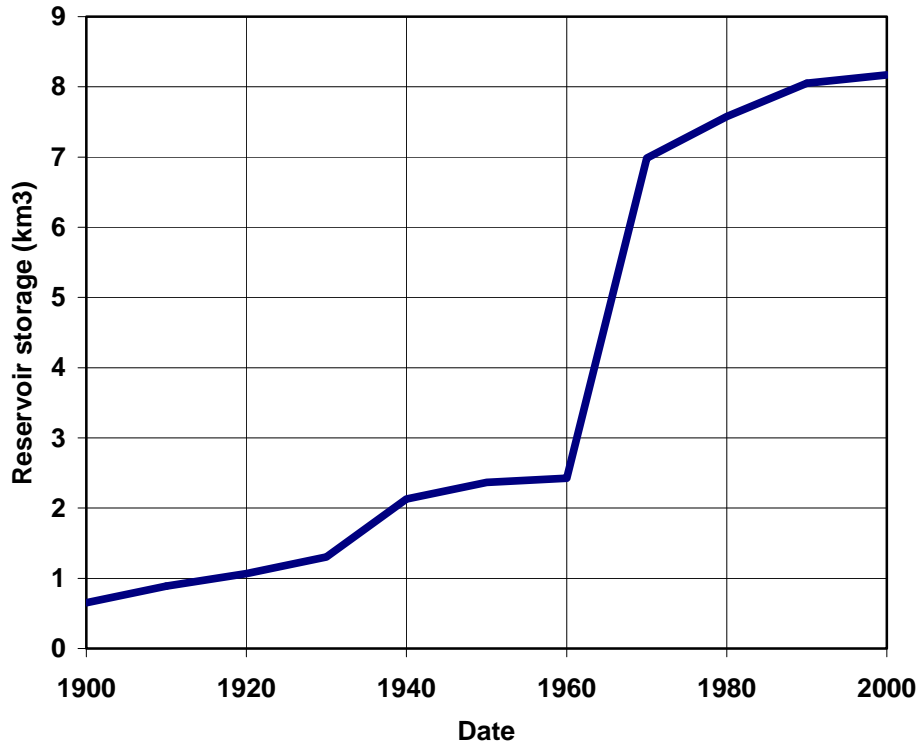

Kielder Water UK

6 Loss of storage due to sedimentation

Loss of reservoir storage occurs when sediments are eroded from the land surface and are transported to reservoirs by the rivers which feed them. Sediment transport in rivers and in reservoirs is affected by a) the nature of the sediments, b) the geometric characteristics of river channels and reservoirs and c) water flows within the system. The loss of storage due to sedimentation exacerbates the problem of providing enough storage of fresh water for the rising world population with its increasing aspirations and standards.

Erosion of the land surface yields sediments which are transported downstream by rivers. Globally the erosion rate has been estimated by many authors. *White*, 2001 (ref. 6) gives the results of 14 studies which show estimates of between 0.06 mm/year and 0.16 mm/year. The most comprehensive study was reportedly that given by *Lal*, 1994 (ref. 7) with a computed global erosion rate of 0.09 mm/year. This equates to 132 t/km²/year assuming a specific weight of eroded sediment of 1.5. Further information is given by *Walling*, 1984 (ref. 8).

The rate of erosion is very variable and depends on a complex interaction of the following factors:

- Climate: precipitation and run-off, temperature, wind speed and direction.
- Geotechnics: geology, volcanic and tectonic activity, soils.
- Topography: slope, catchment orientation, drainage basin area, drainage density.
- Vegetation cover.
- Land use and human impact.

Most of the sediment which is eroded from the land surface is in the form of fine particles which are transported in water courses as a suspended load. These fine sediments account for the turbidity often observed in rivers and their fall velocity in water is so low that the turbulence maintains them in suspension. A small proportion of the sediment, perhaps around 10%, is coarser material which is transported as bed load. These sediments roll along the bed of the river or saltate (hop) close to the bed. Reservoirs act as settling basins for both types of sediment. Coarser sediments tend to be deposited towards the upstream end of reservoirs whereas the finer sediments accumulate further downstream. During the early stages in the life of a reservoir, much of the incoming sediment is trapped and forms areas of sedimentation which progress downstream from the upstream end of the reservoir. However, as the volume of the reservoir diminishes more and more of the incoming sediment passes through the reservoir due to increasing water velocities and reducing times of residence.

Review of Current Knowledge

Estimates for the rate of loss of global storage are given by *White*, 2001 (ref. 6), *Morris and Fan*, 1997 (ref. 10) and *Mahmood*, 1987 (ref. 11). The global estimates varied from 0.5% per annum to 1.0% per annum. The regional distribution of the rate of loss of storage is also considered in these references. Sedimentation causes a reduction in reservoir capacity but the rate of sedimentation diminishes with time, due to the increased throughput of sediment associated with higher flow velocities. Using an analogy with the decay of radioactivity, reservoirs can be assigned a "half life" dependent upon the sedimentation rate. This is the number of years over which reservoir capacity will be halved.

White, 2001 (ref. 6) gives the results of the analysis of sedimentation data for 2 300 of the reservoirs in 31 countries given by *ICOLD*, 2003 (ref. 4). The results published by *White*, 2001 (ref. 6) are given in Table 10 using the regions defined by *Walling and Webb*, 1996 (ref. 9). The annual loss of world storage quoted is 0.5% per annum.

Table 10 Regional distribution of reservoir sedimentation

Region	Estimated annual loss of storage due to sedimentation (%)	Estimated reservoir half life (years)
Southern Asia	0.52	96
Central Asia	1.00	50
South-East Asia	0.30	167
China	2.30	22
Northern Europe	0.20	250
Southern Europe	0.17	294
Middle East	1.50	33
Northern Africa	0.08	625
Sub-Saharan Africa	0.23	217
North America	0.20	250
South America	0.10	500
Pacific Rim	0.27	185

With a current world storage in reservoirs (2003) of around 6 700 km³ and an average annual sedimentation rate of 0.5%, the current annual loss of storage due to sedimentation is 33.5 km³. *Mahmood*, 1987 (ref. 11), based on far less data, gives a much higher annual sedimentation rate of 1% which would double this figure. The loss of storage due to sedimentation is one of the factors which needs to be taken into account in any discussion of future storage needs.

7 Conservation of reservoir storage

Whereas the twentieth century was concerned with the development of reservoir storage, more emphasis will be required in the twenty first century on the conservation of storage because of a) the increasing land take of reservoirs and b) the diminishing availability of suitable, environmentally acceptable and economically viable sites. Sediment management will become crucial. The goal will be to convert the present inventory of non-sustainable reservoirs into sustainable assets for future generations. There have been two recent studies which are very significant in identifying the issues which will be important in this transition from non-sustainable to sustainable storage.

World Bank

The World Bank, see *Palmieri, Shah, and Dinar*, 1998 (ref. 12) and *Palmieri, Shah, Annandale and Dinar*, 2003 (ref. 13), has made a contribution to promote conservation of water storage assets worldwide. This work concentrated on the specific issue of reservoir sedimentation and how it might be reduced, or in some very favourable conditions, eliminated. The work developed the concept of “reservoir life cycle management” and looked at the physical processes by which sediment could be removed, on a regular basis, from reservoirs. A simple mathematical model (RESCON) was developed which enabled decisions to be made on the financial and engineering viability of preserving storage.

Several ways of removing sediments from reservoirs were considered by the World Bank and the following text in italics is a direct quotation from World Bank references:

***Flushing:** Flushing is a technique whereby the flow velocities in a reservoir are increased to such an extent that deposited sediments are re-mobilized and transported through low-level outlets in the dam.*

Two approaches to flushing exist: complete drawdown flushing and partial draw-down flushing. Complete draw-down flushing occurs when the reservoir is emptied during the flood season, resulting in the creation of river-like flow conditions in the reservoir. Partial draw-down flushing occurs when the reservoir level is drawn down only partially. In this case the sediment transport capacity in the reservoir increases, but usually only enough to allow sediment within the reservoir to be re-located, ie sediment is moved from upstream locations in the reservoir basin to locations further downstream and closer to the dam.

Low-level outlets for flushing operations should be close to the original river bed level and of sufficient hydraulic capacity to achieve full draw-down. The intent

Review of Current Knowledge

with flushing operations is to re-create river-like flow conditions in the reservoir. By doing so, the sediment that has deposited is re-mobilized and transported through the low-level gates to the river reach downstream from the dam. This operation is usually performed during the flood season. The low-level gates are closed towards the end of the flood season to capture clearer water for use during the dry season.

Flushing with partial draw-down may be used to move sediments from the upper reaches of a reservoir to zones closer to the dam. If this is done, studies should be completed beforehand to ensure that intake structures and other ancillary facilities are not impacted. Flushing with partial draw-down may be used to clear more live storage space and locate the sediment in a more favorable position for future complete draw-down flushing.

Sluicing: *Sluicing is an operational technique by which a substantial portion of the incoming sediment load is passed through the reservoir and dam before the sediment particles can settle. This is accomplished in most cases by operating the reservoir at a lower level during the flood season in order to maintain sufficient sediment transport capacity through the reservoir. Higher flow velocities and higher sediment transport capacities in the water flowing through the reservoir result from operating the reservoir at these lower levels. The increased sediment transport capacity of the water flowing through the reservoir reduces the volume of sediment that is deposited. After the flood season, the pool level in the reservoir is raised to store relatively clear water.*

Effectiveness of sluicing operations depends mainly on the availability of excess runoff, on the grain size of the sediments and on reservoir morphology. In many cases sluicing and flushing are used in combination.

Density current venting: *Density currents may develop under exceptional conditions, causing more sediment to be transported towards the dam than the relationships for turbulent suspension indicate. Such currents occur because the density of the sediment carrying water flowing into the reservoir is greater than the density of clear water impounded in a reservoir. The increased density, increased viscosity and concomitant reduction in turbulence intensity result in a coherent current with a high sediment concentration that dives underneath the clear water and moves towards the dam.*

If it is known that density currents occur in a particular reservoir, installation and operation of low-level gates in the dam will make it possible to pass the sediment current through the dam for discharge downstream. By passing the density current through the low-level gates, sediment that would have deposited in the reservoir is released downstream, thus reducing storage loss. Density current venting is an

Review of Current Knowledge

attractive way of releasing sediment laden flows because, unlike flushing operations, it does not require the lowering of the reservoir level.

Mechanical removal: *Mechanical removal of deposited sediment from reservoirs takes place using conventional dredging techniques, dry excavation or hydrosuction.*

Dredging: *The process of excavating deposited sediments from under water is termed dredging. Dredging is a highly specialized activity which is mostly used for clearing navigation channels in ports, rivers and estuaries. However, the technology is often used in reservoirs also.*

Sediment dredging is commonly used to reclaim storage lost to sediment deposits. However, conventional hydraulic dredging is often much more expensive than the cost of storage replacement and it is generally not economically viable to remove all sediment from reservoirs by means of dredging alone. With large contracts the cost of dredging can approach the cost of building a new dam.

Disposal of dredged material can constitute an environmental problem and suitable mitigating measures, which can be quite expensive, have to be found on a case by case basis. If discharged directly downstream from the dam, the high sediment concentrations generally associated with dredging can be unacceptable from an environmental point of view. However, it may be possible to reduce the sediment concentration of the water flowing in the river by releasing clean water from the reservoir concurrently with the release of dredged material. If the material is not deposited downstream of the dam, then large expanses of landfill may be required.

Dry excavation: *Dry excavation (also known as trucking) requires the lowering of the reservoir during the dry season when the reduced river flows can be adequately controlled without interference with the excavation works. The sediment is excavated and transported for disposal using traditional earth moving equipment. Excavation and disposal costs are high, and as such this technique is generally used for relatively small impoundments. Reservoirs used for flood control may be more amenable to sediment management by trucking, such as has been performed at Cogswell Dam and Reservoir in California. The sediment from this reservoir has been excavated with conventional earth moving equipment and has been used as engineered landfill in the hills adjacent to the reservoir.*

Hydrosuction: *This is a variation of traditional dredging. The difference is that the hydraulic head available at the dam is used as the energy for dredging instead of pumps powered by electricity or diesel. As such, where there is sufficient head available, the operating costs are substantially lower than those of traditional*

Review of Current Knowledge

dredging. The system consists of a barge that controls the flow in the suction and discharge pipe and can be used to move the suction end of the pipe around. The upstream end of the pipe is located at the sediment level in the reservoir and its downstream end is usually draped over the dam to discharge sediment and water to the downstream river. The arrangement of the pipe layout essentially creates a siphon and the suction at the upstream end of the siphon is used to evacuate sediment. The system can be used in relatively short reservoirs, not longer than approximately 3 km and also depends on the elevation of the dam and reservoir.

Of these methods, the viability of flushing has been researched in detail, including a worldwide review of the application of this method, see **White**, 2001 (ref. 6). The study showed that, for effective flushing, the following factors need to be considered and satisfied:

Hydraulic conditions required for efficient flushing: Riverine conditions must be created in the reservoir for a significant length of time. The reservoir level must be held low throughout the flushing period, possibly with minor fluctuations in level to activate sediment movement. To achieve this:-

- The hydraulic capacity of the bypass must be sufficient to maintain the reservoir at a constant level during the flushing period.
- Flushing discharges of at least twice the mean annual flow are required.
- Flushing volumes of at least 10% of the mean annual runoff should be anticipated.

Quantity of water available for flushing: There must be enough water available to transport the required volume of sediment. This has the following implications:-

- Reservoirs where the annual runoff is large compared with the volume of the reservoir are best suited for sediment flushing.
- A regular annual cycle of flows and a defined flood season provide optimum conditions for sediment flushing. This favours sites in monsoon areas and sites where flood flows are generated by annual snowmelt in the spring and summer months.
- A balance must be achievable between the significant quantities of water required for sediment flushing and water required to satisfy demands at other times of the year - for irrigation and hydropower, for example.

Mobility of reservoir sediments: Sediment sizes are an important factor in determining whether the quantity of water available for flushing will be adequate to remove the desired quantity of sediment from the reservoir.

- Deposited coarse sediments are more difficult to remove than fine sediments. These sediments progress from the upstream end of the reservoir and the toe of the fore-set slope reaches the dam well into the life of the reservoir. The

Review of Current Knowledge

sustainable volume achievable by sediment flushing depends on the nature of the deposited sediments and other factors.

- The sediment sizes in transport in rivers entering a reservoir can be of paramount importance in determining the success of flushing. From the point of view of achieving a sediment balance, a large factor is desirable between the sediment sizes being transported as suspended bed material load in the rivers entering the reservoir and the sizes found in the river bed material. Such conditions are typical for gravel rivers with a widely varying bed material composition. In large rivers this situation is found where the longitudinal bed gradient is between, say, 0.002 and 0.001. In smaller rivers the equivalent range may be 0.005 to 0.002.
- From the point of view of sediment size alone, delta deposits of fine sand and coarse silt are the most likely to produce success in flushing a reservoir. Coarser material may inhibit a sediment balance and finer material will deposit in the body of the reservoir outside any incised channel and so will not be available for reworking during flushing.

Site specific factors: The most suitable conditions for flushing are to be found in reservoirs which approximate in shape to the incised channel which develops during flushing. Long, relatively narrow reservoirs are better suited to flushing than short, wide, shallow reservoirs.

Sluicing, density current venting, mechanical removal, dredging, dry excavation and hydrosuction are less well documented in terms of the practical constraints on their usage. Further research is required including surveys of worldwide experience using these techniques.

World Commission on Dams

The World Commission on Dams carried out an extensive series of studies, see *WCD*, 2000 (ref. 14). Whilst acknowledging the contribution made by storage reservoirs in terms of power generation, irrigation and water supply, the overwhelming emphasis was on the social and environmental impacts of large reservoirs and how decision-making could be improved in future developments. The following quotation from the Commission's report summarises its recommendations for change:

From Global Review to Future Practice

Along with all development choices, decisions on dams must respond to a wide range of needs, expectations, objectives and constraints. As matters of public choice and policy they will always reflect competing interests and require negotiation. Reconciling competing needs and entitlements is the single most important factor in addressing the conflicts associated with development projects

Review of Current Knowledge

and programmes - particularly large-scale interventions such as dams.

Access to water provides a graphic illustration of such competing needs and development objectives and the reason why equity and justice considerations emerge as key issues. Riparian communities with longstanding use rights and economies that depend on local resources have an immediate interest in maintaining current use patterns and assuring fulfilment of their future needs. However, in the context of national policies, meeting development needs may require sharing water resources. To balance these needs societies will have to negotiate a framework for equitably sharing the resource. History shows that this can be done successfully provided a transparent and legitimate process is followed.

Dams have often been seen as an effective way of meeting water and energy needs. However, the Global Review has emphasised the wide range of problems associated with them. The Commission acknowledges that today's perspective on development reflects the benefit of knowledge that may not have been available to past decision-makers. Nonetheless, it is clear that the positive contribution of large dams to development has, in many cases, been marred by significant social and environmental impacts which are unacceptable when viewed from today's values.

The debate about dams is a debate about the very meaning, purpose and pathway of development as well as the role that the State plays in both protecting the rights of its citizens and responding to their needs through development policies and projects. The WCD Global Review showed clearly that large-scale infrastructure projects such as dams can have devastating impacts on the lives and livelihoods of affected communities and ecosystems, particularly in the absence of adequate assessments and provisions being agreed to address these impacts.

Improving the development process and its outcomes must start with a clear understanding of the shared values, objectives and goals of development and their implications for institutional change. The Commission grouped the core values informing its understanding on these issues under five main headings:

- *Equity*
- *Efficiency*
- *Participatory decision-making*
- *Sustainability*
- *Accountability*

8 Global warming and climate change

This chapter discusses the water issues surrounding global warming and climate change. The evidence for global warming and climate change is now well established and documented and this ROCK rests heavily on the work of the Intergovernmental Panel for Climate Change (IPCC).

An enormous amount of scientific effort has been invested in the subjects of global warming and climate change in recent years. Extensive field measurements over many years and the development of soundly based numerical models have placed the subject on a much firmer footing. No longer are claims of global warming simply based on anecdotal evidence of "rare" or "unusual" climatic events or sequences of such events. Despite this, there remains a small group of sceptics who, in particular, query whether current climate change trends are natural or man-made and whether the trends are cyclic or progressive.

The Intergovernmental Panel for Climate Change (IPCC) was established by the United Nations Environmental Programme (UNEP) and the World Meteorological Organisation (WMO) in 1988 to provide a clear scientific view on the current state of climate change. It reviews and assesses the most recent scientific, technical and socio-economic information relevant to the understanding of climate change and collates scientific evidence from all over the world. Scientists contribute to the work of the IPCC on a voluntary basis and any differing viewpoints existing within the scientific community are reflected in the IPCC reports.

Because of its scientific and intergovernmental nature, the IPCC embodies an opportunity to provide rigorous and balanced scientific information to decision-makers. By endorsing the IPCC reports, governments acknowledge the authority of their scientific content. The work of the organization is therefore policy-relevant and yet policy-neutral, never policy-prescriptive.

Climate change, in IPCC usage, refers to a change in the state of climate that persists for an extended period, typically decades or longer. It refers to climate change over a long period induced by natural causes and human activity. Pre 1850 almost all variations in climate had natural causes and were not affected by man. However, human activities have had a noticeable effect in more recent times, particularly during the latter half of the 20th century.

The following summary is based on IPCC reports, see *IPCC*, 2007 (ref. 15). The main findings and projections for the future are given in this report together with

Review of Current Knowledge

an indication of the uncertainties associated with the data and the predictions. These are summarised in the following sections.

Uncertainties

The subject of climate change is not an easy one. The collection of data is challenging and the scale and complexity of the science should not be underestimated. Hence the data, the physics embodied in climate models and the prediction from the models all have a degree of uncertainty. The IPCC approach is to define sets of descriptors which enable the reader to assess the reliability (or otherwise) of the data, the theory, the model(s), future predictions etc.

Where uncertainty is assessed qualitatively, it is characterised by providing a relative sense of the amount and quality of the evidence. Terms such as *high agreement*, *medium evidence* and *poor agreement* are used.

Where uncertainty is assessed more quantitatively using expert knowledge / judgement, a range of so-called confidence levels are used, such as *very high confidence*, *high confidence*, *medium confidence* and *low confidence*.

Where uncertainty in specific predictions is assessed using expert knowledge / judgement / statistical analysis of a body of evidence / numerical models, then the following ranges of likelihood are used to express the assessed probability of occurrence: *virtually certain*, *extremely likely*, *very likely*, *likely*, *more likely than not*, *about as likely as not*, *unlikely*, *very unlikely*, *extremely unlikely* and *exceptionally unlikely*.

This ROCK follows these descriptors where possible.

Observed changes in climate to 2007

Direct evidence to show that the climate system has warmed significantly during the last 150 years is now strong. Three main indicators are quoted by IPCC:

1. The average temperature of the world's near surface air and also the oceans has increased significantly since 1850 from approx. 13.5 deg C to approx. 14.5 deg C.
2. Since 1870 the average sea level has increased by approx. 200 mm, a average rate of 1.4 mm per year. The rate of increase over that period is not constant and in the period 1960 to 2003 it was 1.8 mm per year. From 1993 to 2003 the rate was 3.1 mm per year but it is not clear whether this was a short or a long term effect.
3. Observations of snow and ice cover are also consistent with warming. Satellite data from 1978 onwards shows major changes in global ice cover. The annual

Review of Current Knowledge

average extent of the Arctic sea ice has shrunk by 2.7% per decade, with larger decreases in summer of 7.4% per decade.

Indirect evidence from all continents and most oceans shows, with *high confidence*, that many natural systems are being affected by regional climate change, particularly temperature increases. Examples include:

1. Enlargement and increased number of glacial lakes.
2. Increased ground instability in permafrost regions and rock avalanches in mountainous regions.
3. Changes in some Arctic and Antarctic ecosystems.

Causes of climate change

The drivers of climate change are:

1. Changes in the atmospheric concentrations of greenhouse gases and aerosols.
2. Changes in vegetative land cover.
3. Changes in solar radiation.

Human activities influence items 1 and 2.


These drivers affect the absorption, scattering and emission of radiation within the atmosphere and at the Earth's surface. The resulting positive or negative changes in the energy balance influence the global climate.

Human activities result in emissions of four long-lived greenhouse gases, carbon dioxide, methane, nitrous oxide and the halocarbons. The concentrations of these increase in the atmosphere when emissions exceed natural absorption levels.

Figure 8 shows the observed emissions of these four greenhouse gases between 1970 and 2004. Total emissions have increased by 70% over that period and emissions of the major contributor, carbon dioxide, have increased by 80%.


Review of Current Knowledge

Figure 8 Worldwide greenhouse gas emissions from 1970 to 2004

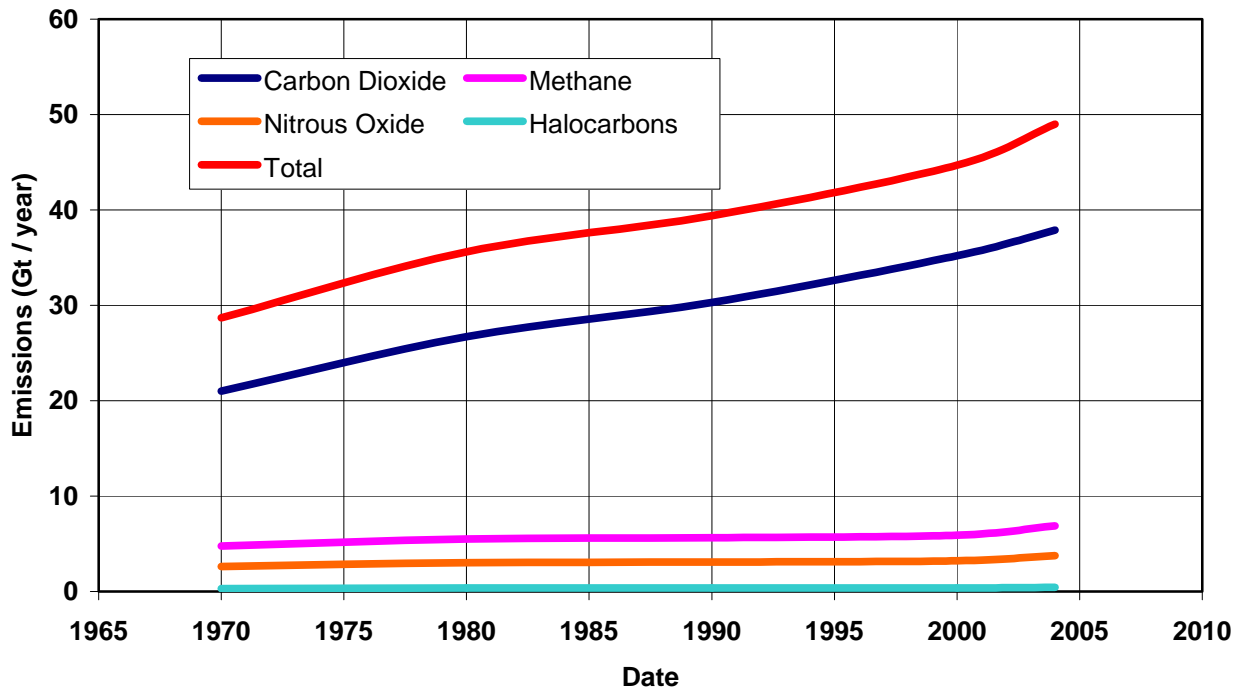

The IPCC report identifies the source of these emissions sector by sector. The distribution is shown in Figure 9.

Figure 9 Worldwide greenhouse gas emissions from 1970 to 2004 by sector

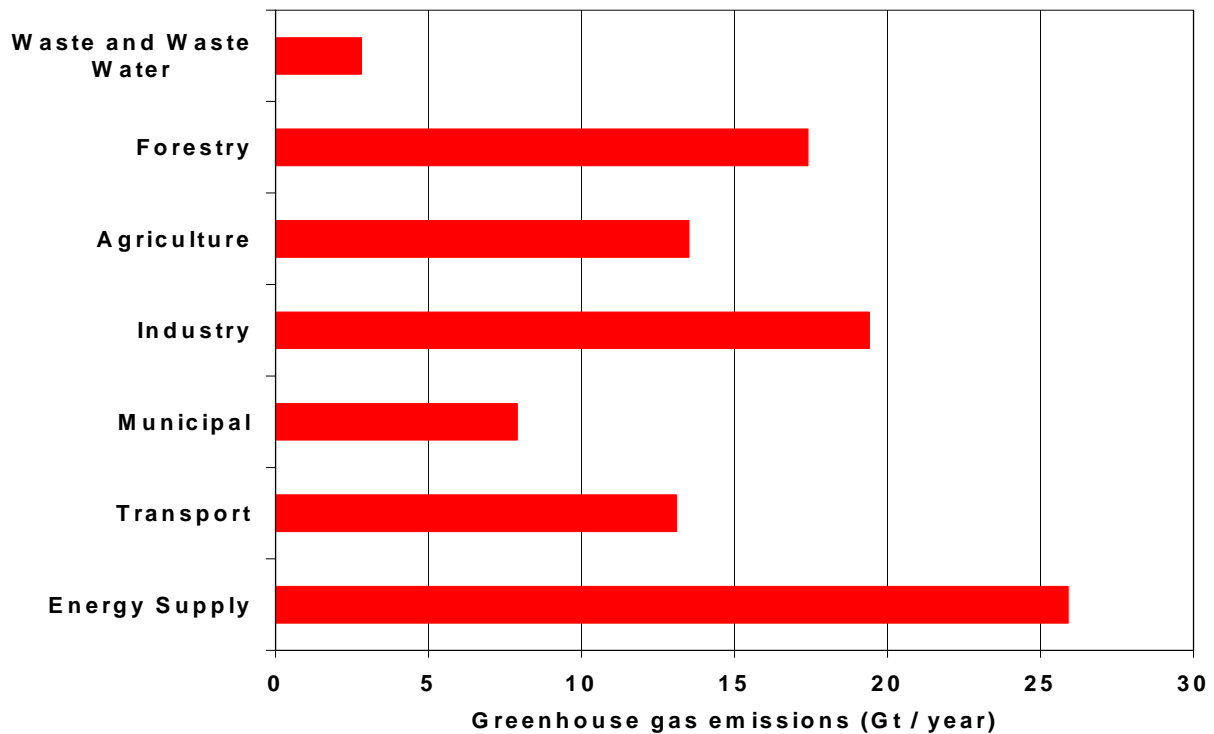

Review of Current Knowledge

Table 11 is taken from *USCB*, 2009 (ref. 5) and shows those countries with the ten highest carbon dioxide emissions in 2006. It also shows the carbon dioxide emissions per person. The populous countries of China and India currently have emissions per person much lower than other countries in this list.

Table 11 Carbon dioxide emissions by country

Country	Carbon dioxide emissions per annum (million tonnes)	Carbon dioxide emissions per person per annum (tonnes)
United States	5 697	19
China	5 607	4
Russia	1 587	11
India	1 250	1
Japan	1 213	9
Germany	823	10
Canada	539	17
United Kingdom	536	9
South Korea	476	10
Italy	448	8

In an attempt to put these increases in greenhouse gas emissions into perspective the IPCC has looked at historic concentrations in the atmosphere based on samples from ice cores spanning many thousands of years. Carbon dioxide concentrations in the atmosphere for 10 000 years prior to 1800 were consistently in the range 260 to 280 ppm. However, since the start of the industrial era concentrations have risen continuously. They reached 310 ppm by 1950 and are currently approaching 380 ppm, a major escalation in the last 60 years.

The IPCC concludes that most of the observed increase in global average temperature since the mid 20th century is *very likely* to be due to the observed increases in anthropogenic greenhouse gas concentrations.

Further information on both carbon dioxide concentrations and atmospheric temperatures are provided by the European Project for Ice Coring in Antarctica, *EPICA*, (ref. 16). The data from ice cores goes back at least 80 000 years. Data on atmospheric temperatures covering the last 60 years, based on readings taken at Mauna Loa, are available through a US Federal Agency, the National Oceanic and Atmospheric Administration, *NOAA*, (ref. 17). *The Meteorological Office, Hadley Centre*, (ref. 18), also provides detailed information, including very recent trends.

Review of Current Knowledge

Global warming since 1900

Further confirmation comes from the use of climate change models which can simulate changes in surface temperature as affected by (i) natural causes and (ii) natural causes plus anthropogenic causes associated with human activities. Many models have been used to simulate temperature changes over the last 100 years with and without anthropogenic influences and the results compared with observations. Whilst the models have difficulty in simulating local conditions they can be applied to the oceans and land masses on a global scale and to continents on a regional scale.

The IPCC reports that none of the models using only natural influences has reproduced the continental mean warming trends in individual continents (except Antarctica) over the second half of the 20th century. Those models which include anthropogenic influences show much closer agreement with observations.

Climate change since 1900

The IPCC reports that most models under most circumstances suggest that discernable human influences extend beyond average global temperatures to other aspects of climate, including temperature extremes and wind patterns. Table 12 gives a summary of the changes since 1900 together with their likelihood.

Table 12 Climatic changes since 1900 as related to human activities

Effect	Likelihood of anthropogenic cause
Sea levels rise	<i>Very likely</i>
Temperatures of the most extreme hot nights, hot days and cold days.	<i>Likely.</i>
Increased risk of heat waves.	<i>More likely than not.</i>
Changes in wind patterns affecting extra-tropical storm tracks and temperature patterns in both hemi-spheres.	<i>Likely.</i>
Changes in the wind circulation patterns in the Northern Hemisphere	<i>No strong evidence (Not well simulated by climate models)</i>
Changes in the hydrological cycle and an increased precipitation over land.	<i>Some evidence.</i>
Increase in areas affected by drought since 1970.	<i>More likely than not.</i>
Global scale changes in many physical and biological systems	<i>Likely</i>

Review of Current Knowledge

Climate change in the near and long term future

Climate models are being developed continuously and their ability to simulate the complicated processes which occur in the Earth's atmosphere is improving all the time. They are now capable of simulating the changes which have occurred up until the present time with reasonable accuracy as described in the previous sections of this chapter. It is therefore appropriate to use these models to look into the near and long term future, although the further one goes into the future the less reliable the predictions become. The task is not straightforward because of the number of variables which have to be considered. Future population growth and the associated domestic, industrial and agricultural activities will all influence greenhouse gas emissions and the natural ability of Earth's atmosphere to absorb these changes.

The IPCC approach is to use various scenarios which consider alternative development pathways covering a range of demographic, economic and technological driving forces and resulting greenhouse gas emissions. The scenarios assume the internationally agreed climate policies in place in 2007 and exclude any more recent agreements.

In general terms, there are four basic scenarios:-

- A1. A world in which there is continued rapid economic growth, a global population which peaks in 2050 and a rapid introduction of new and more efficient technologies. This scenario is sub-divided depending upon whether the technological change is fossil fuel related (A1F) or non-fossil fuel related (A1T) or a balance between the two (A1B).
- A2. A heterogeneous world with high population growth, slow economic development and slow technological change.
- B1. A convergent world with the same population as in A1 but with more rapid changes in economic structures towards service and information economies.
- B2. A world with intermediate population and economic growth, emphasising local solutions to economic, social and environmental sustainability.

No likelihood is attached to these scenarios.

Simulations of these scenarios assume an emission rate of 40 Gt of greenhouse gases in 2000 and compute rates of emission through to 2100. A summary of the results is given in Table 13.

Review of Current Knowledge

Table 13 Projected greenhouse gas emissions as influenced by development paths

Scenario	Annual greenhouse gas emissions (Gt)	
	2050	2100
A1F	110	130
A1T	61	28
A1B	76	61
A2	85	137
B1	55	25
B2	57	67

Projected global effects of these emissions from the year 2000 to the year 2100 are given in Table 14.

Table 14 Projected global increases in temperatures and sea levels to the year 2100

Scenario	Temperature increase (deg C)		Sea level rise (m)
	Best estimate	Range of model results	Range of model results
A1F	4.0	2.4 - 6.4	0.26 - 0.59
A1T	2.4	1.4 - 3.8	0.20 - 0.45
A1B	2.8	1.7 - 4.4	0.21 - 0.48
A2	3.4	2.0 - 5.4	0.23 - 0.51
B1	1.8	1.1 - 2.9	0.18 - 0.38
B2	2.4	1.4 - 3.8	0.20 - 0.43

In 2007 the IPCC expressed a growing confidence in the ability of climate models to make reasonable projections of future changes on a regional basis, including changes in wind patterns and precipitation.

The projected warming to the year 2100 shows geographical patterns similar to those observed in recent decades. Warming is expected to be greatest over land, particularly at high northern latitudes. It is expected to be least in the Southern Ocean and the North Atlantic.

General impacts of future climate change

IPCC, 2007 (ref. 15) gives key findings in terms of the impacts of future climate change to 2100 and these are summarised in Table 15.

Review of Current Knowledge

Table 15 Projected impacts of climate change to the year 2100

	Impact	Likelihood
Ecosystems	The resilience of many systems will be exceeded due to the effect of climate change on flooding, drought, wildfires, ocean acidification etc.	<i>Likely</i>
	Approx. 20 to 30% of plant and animal species will be at an increased risk of extinction.	<i>Likely</i>
	Increased greenhouse concentrations in the atmosphere will cause major changes in ecosystem structure and function.	<i>Not stated</i>
Food	On a global basis, crop production will generally increase slightly for temperature increases up to 3 deg C and then decrease beyond that in some areas.	<i>Medium confidence</i>
	At low altitudes, in some areas, crop production will reduce with increases of only 1 or 2 deg C.	<i>Medium confidence</i>
Coasts	Coasts will suffer increased risks from coastal erosion and sea level rise	<i>Very high confidence</i>
	Large populations will be exposed to increased flood risk especially in the low-lying mega-deltas of Asia and Africa	<i>Very high confidence</i>
Industry, settlement and Society	The most vulnerable will be those located in coastal and river floodplain areas, those where the economy is closely related to climate sensitive resources and those in areas prone to extreme weather events.	<i>Not stated</i>
Health	Health will generally be affected, for example, by malnutrition, the consequences of extreme weather etc. Factors such as education, health care and economic development will be crucial.	<i>Not stated</i>
	Some minor benefits may arise from increased temperatures in some areas.	<i>Not stated</i>
Water	Water impacts are key to all sectors and regions.	<i>See below</i>


Review of Current Knowledge

Impacts of future climate change on water issues

Climate change is affecting the water environment and further changes to the year 2100 have been investigated using 12 independent climate models. The results using the A1B scenario (mixed use of fossil and other fuel sources) are reported by *IPCC* (ref. 15).

A visual global impression of the IPCC results is shown in Figure 10.

Figure 10 Projections and model consistency of relative changes in run-off by 2100 [Reproduced from Reference 15]

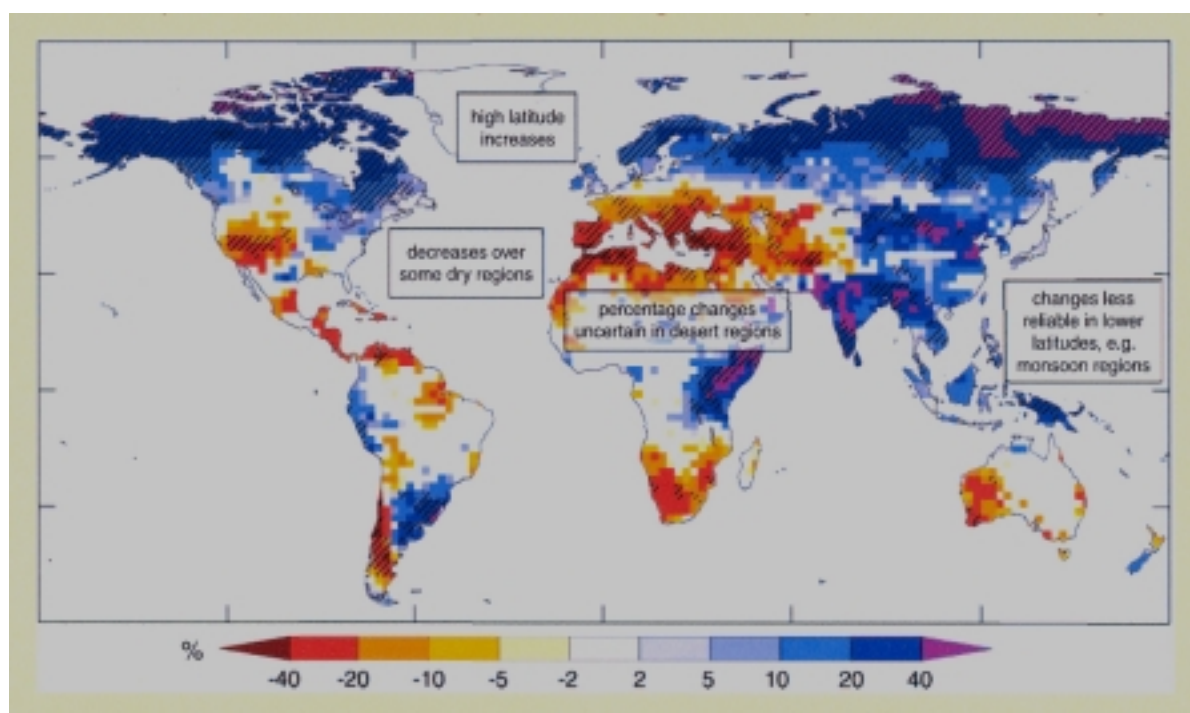

The results, using the regions defined in this ROCK, are summarised in Table 16.

Table 16 Projected regional changes in the annual run-off to 2100

Region	Predicted change in annual run-off to 2100
Asia	Northern latitudes (+ 20% to + 40%)
	Mid latitudes (+ 2% to + 20%)
	Southern latitudes (+ 10% to + 40%)
Europe	Northern latitudes (0% to + 20%)
	Southern latitudes (0% to - 40%)
Middle East and North Africa	All regions (- 5% to - 40%)

Review of Current Knowledge

Region	Predicted change in annual run-off to 2100
Sub-Saharan Africa	Eastern seaboard, mid latitudes (+ 5% to + 40%) Southern region (- 5% to - 20%) Little change elsewhere
North America	Northern latitudes (+ 10% to + 40%) Western seaboard, mid latitudes (- 5% to - 20%) Little change elsewhere
Central America and Caribbean	All regions (0% to - 20%)
South America	Eastern seaboard, southern latitudes (+ 5% to + 20%) Western seaboard, northern latitudes (+ 5% to + 10%) Eastern seaboard, southern latitudes (0% to - 40%) Little change elsewhere
Oceania	Northern latitudes (0% to + 20%) Western seaboard, mid latitudes (- 5% to - 20%) Southern latitudes (0% to +10%) Little change elsewhere

Changes in run-off will affect the availability of water for domestic, industrial and agricultural purposes. Run-off is predicted with *high confidence* to increase significantly at higher latitudes and in some wet tropical areas, including populous areas in East and South East Asia. Significant reductions in run-off are predicted with *high confidence* for some dry regions at mid-latitudes due to reduced precipitation and increased evapo-transpiration. There is also *high confidence* that many semi-arid areas, such as the Mediterranean Basin, western United States, southern Africa and north-eastern Brazil, will suffer a decrease in water resources. Drought areas are predicted to increase in area.

Overall, the consequences of the anticipated changes to the hydrological cycle on humanity, brought about by climate change are:-

- An increased demand for irrigation water for food production, which is likely to translate into a demand for more storage reservoirs for fresh water.
- An increased demand for hydropower to enhance energy supplies from non-fossil related sources.
- A need to protect communities from flooding, whether caused by more severe storms in inland areas or the effects of sea level rise in coastal zones.

Review of Current Knowledge

9 Future needs for reservoir storage

This chapter looks at future needs for reservoir storage.

Man-made reservoirs are used for many purposes. They are particularly useful where precipitation patterns are seasonal, storing flood waters which would otherwise be lost to the system and releasing water during prolonged dry periods. The pressure for more storage comes from two main factors:-

- the increasing world population
- the increasing needs and aspirations of the population

As a result of these two factors there are pressures on food production, power production, and water quantities for industrial and domestic purposes. Man-made reservoirs are particularly relevant to all of these.

The prediction of how much more storage will be required to meet future needs is a complex issue. It depends on many individual factors which are difficult to predict and which are often inter-dependent. Past experience can be used to look at short to medium term needs, say up to 25 years ahead, but uncertainties in longer term predictions remain high. This is particularly so in the light of climate change and the measures which are taken to combat climate change.

Short term requirements for reservoir storage

The approach adopted by *White*, 2001 (ref. 6) was to look at historic growth rates for several relevant parameters for the period from 1975 to 1995 and then to use these trends to make predictions for the mid-term future.


The relevant parameters included:-

- The population growth rate
- Water demand for both domestic and industrial purposes
- Demand for hydro-power
- Demand for irrigation water for food production

White, 2001 (ref. 6) assumed a population growth rate globally of 1.4% per annum in the year 2000 falling to 0.45% per annum by 2050 when the population would be around 10 billion. Subsequent estimates reduce this final figure marginally. Global growth rates in the demand for water were considered to be 2.5% per annum in 1975 and 2.3% per annum in 1995. Corresponding rates for hydro-power were 3.2% per annum and 2.6% per annum and for irrigation 1.8% per annum and 1.5% per annum. These data, together with population data are shown in Figure 11.

Review of Current Knowledge

Figure 11 Global growth rate for new storage

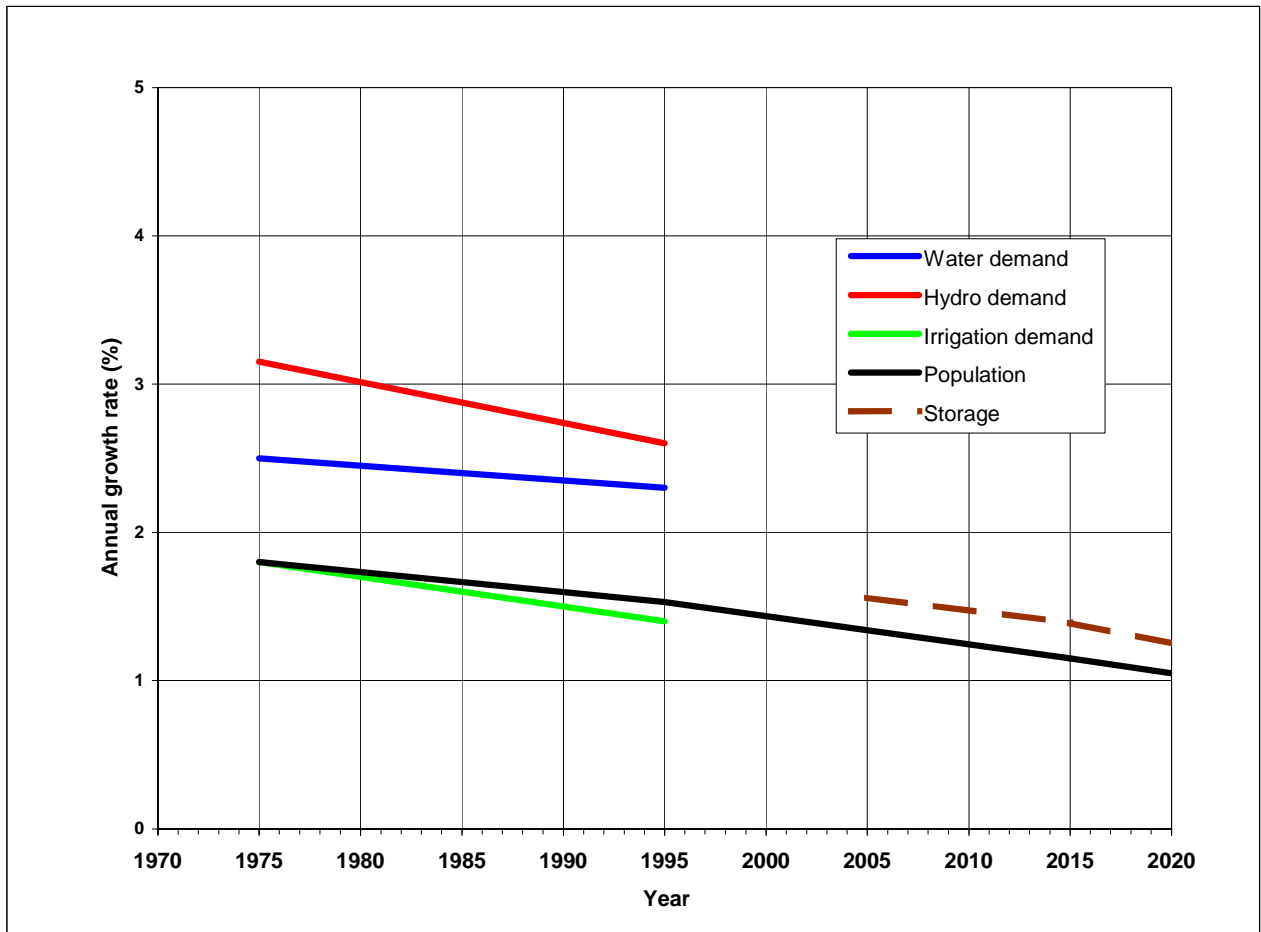


White, 2001 (ref. 6) suggested that, to meet demand, a modest growth rate in reservoir storage of 1.5% in 2005 falling to 1.3% in 2020 would be required. Dams under construction at the date of this study would provide a reservoir capacity of 489 km³, representing 7% of the world total. Russia and China accounted for 235 km³ of this additional reservoir capacity.

In the analysis made by *White*, 2001 (ref. 6), known rates of dam construction in the period 2000 to 2010 were applied to the following two decades. The current rate of loss of storage due to sedimentation of 0.5% was applied throughout the period. The demand for additional storage is assumed to be 1.6% in 2000 falling to 1.2% in 2030. The results of this analysis, on a global scale, are shown in Figure 12.

Review of Current Knowledge

Figure 12 Future trends in reservoir storage

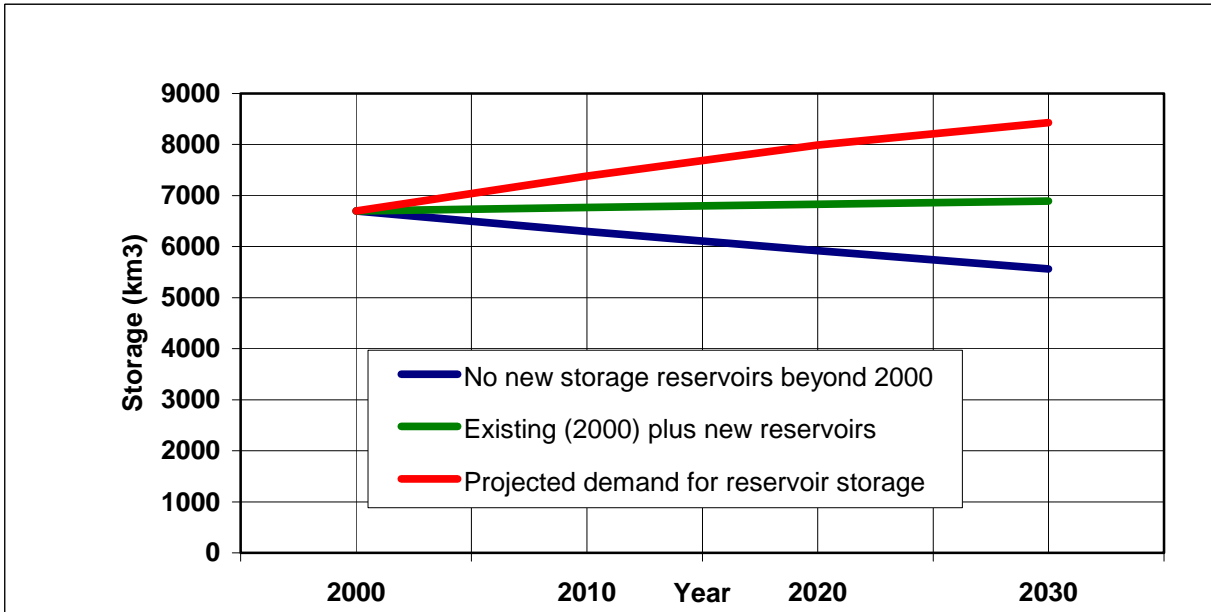

The lower curve in Figure 12 shows how reservoir storage would diminish due to sedimentation if no new reservoirs were to be constructed. The central curve shows how reservoir storage would develop if the rate of dam construction in 2000 to 2010 continues to 2030. The upper curve is the projected demand for storage. A shortfall of around 1 500 cubic kilometres is anticipated in 2030 using this analysis.

The analysis presented by *White*, 2001 (ref. 6) also provides an indication of regional mis-matches between projected supply and demand for storage. These are illustrated in Figure 13.



Three Gorges Dam, China

Review of Current Knowledge

Figure 13 Future regional trends in reservoir storage

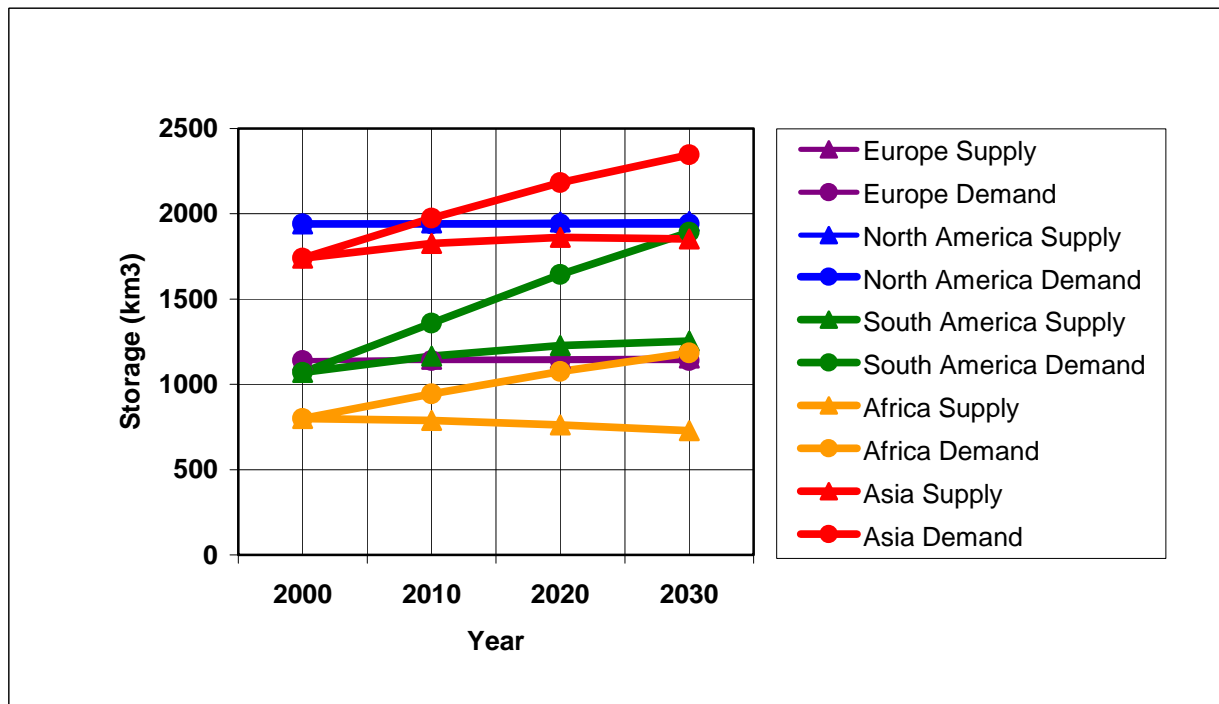


Figure 13 shows that in Europe and North America the demand for, and supply of, reservoir storage will generally remain in balance for the foreseeable future. This is due to relatively low population growth rates and public aspirations which are already largely met. The picture in South America, Africa and Asia is very different with demand outstripping supply in the foreseeable future.

Longer term requirements for reservoir storage

Table 17 lists the more important regional parameters which are of relevance in deciding where the most and the least pressures will lie for more reservoir storage in the longer term.

Column 2 lists the water resources available per person and column 3 lists their current usage of water. Column 4 is the ratio of columns 2 and 3 and shows the percentage usage of available water resources in the region. Column 5 is the current reservoir storage in the region and column 6 is the ratio of the reservoir storage to available water resources per annum. Column 7 is taken from *USCB*, 2009 (ref. 5) and gives an indication of the rate of population growth in the regions. Column 8 is taken from Table 16 and gives an indication of the likely changes in precipitation / run-off in the regions.

Review of Current Knowledge

Table 17 Some regional parameters relating to reservoir storage requirements

Region	Actual renewable water resources [ARWR] per person (m ³ /yr)	Water usage [WU] per person (m ³ /yr)	Total WU / ARWR (%)	Total reservoir storage [TRS] (km ³)	TRS as % of annual ARWR	Predicted growth of population from 2009 to 2050 (%)	Predicted change in annual runoff to 2100 (%)
1	2	3	4	5	6	7	8
Asia	3 938	581	15	1 299	9	+ 33	+ 2 to + 40
Europe	10 663	566	5	1 199	48	- 14	+ 20 to - 40
Middle East and North Africa	1 408	782	56	285	62	+ 59	- 5 to - 40
Sub-Saharan Africa	6 944	152	2	580	11	+ 110	- 20 to + 40
North America	17 770	991	6	1 922	32	+ 41	- 5 to + 40
Central America and Caribbean	6 956	561	8	150	12	+ 29	0 to - 20
South America	45 323	437	1	969	6	+ 23	+ 20 to - 40
Oceania	52 906	812	2	111	7	+ 61	- 20 to + 20
WORLD	8 281	555	7	6 616	12	+ 38	0 to + 10

Review of Current Knowledge

Table 18 is an attempt to summarise the needs of different regions for more storage in fresh water reservoirs based on the information given in Table 17 and elsewhere in this ROCK. The predictions of the effects of climate change and future world development scenarios are such that it would be invidious to deal with this subject country by country.

Table 18 Regional needs for fresh water storage

Region	Notes	Storage needs
Asia	<ul style="list-style-type: none"> • High population growth rate • Significant increase in run-off in most areas • Water usage a significant proportion of run-off • Many developing countries with power needs 	<i>Very likely</i> to need a significant increase in reservoir storage for agricultural, domestic and industrial needs.
Europe	<ul style="list-style-type: none"> • Population almost static • Less run-off in southern areas • Countries mainly developed 	<i>Unlikely</i> to need significant increase in reservoir storage except in drought prone southern areas.
Middle East and North Africa	<ul style="list-style-type: none"> • Very high population growth rate • Significant reduction in run-off • Water usage a high proportion of run-off • Mixture of developed and developing countries 	<i>Likely</i> to need more reservoir storage for agricultural, domestic and industrial needs but this will be difficult to provide.
Sub-Saharan Africa	<ul style="list-style-type: none"> • Extremely high population growth rate • Less run-off in central areas, more elsewhere • Mainly developing countries 	<i>Very likely</i> to need a significant increase in reservoir storage for agricultural, domestic and industrial needs.
North America	<ul style="list-style-type: none"> • Medium population growth rate • Significant increase in run-off in most areas • Developed countries 	<i>Unlikely</i> to need significant increase in reservoir storage except in areas of reduced run-off.

Review of Current Knowledge

Region	Notes	Storage needs
Central America and Caribbean	<ul style="list-style-type: none"> • Medium population growth rate • Not much change in run-off • Mainly developing countries 	<i>Likely</i> to need some increase in reservoir storage for agricultural, domestic and industrial needs.
South America	<ul style="list-style-type: none"> • Medium population growth rate • Significant reduction in run-off in many areas • Mixture of developed and developing countries 	<i>Unlikely</i> to need significant increase in reservoir storage except in areas of reduced run-off and in some developing countries.
Oceania	<ul style="list-style-type: none"> • Very high population growth rate • Modest increases or decreases in run-off dependent upon location • Mainly developed countries 	<i>Likely</i> to need some increase in reservoir storage for agricultural, domestic and industrial needs dependent upon location.

Review of Current Knowledge

References

1. **White W R and Rofo B H.** 1996. *Responsibilities and risks associated with large reservoirs.* International Conference on Aspects of Conflicts in Reservoir Development and Management. City University, London, 3 - 5 September.
2. **International Commission on Large Dams (ICOLD).** 2007. *Dams and the World's Water.* Copyright CIGB-ICOLD. Available on-line at: www.icold-cigb.org.
3. **Food and Agriculture Organization of the United Nations (FAO). Water Resources, Development and Management Service.** 2009. *AQUASTAT Information System on Water in Agriculture: Database.* Available on-line at: www.fao.org.
4. **International Commission on Large Dams (ICOLD).** 2003. *World Register of Dams.* ICOLD. Paris.
5. **United States Census Bureau, World Population Data Sheet.** 2009. Available on-line at: www.prb.org.
6. **White W R.** 2001. *Evacuation of sediments from reservoirs.* Thomas Telford Publishing. London. ISBN 0 7277 2953 5.
7. **Lal R.** 1994. *Soil Erosion by Wind and Water: Problems and Prospects.* In Lal R. *Soil Erosion Research Methods.* Soil and Water Conservation Society. Ankey, Iowa.
8. **Walling D E.** 1984. *The Sediment Yields of African Rivers.* Pp. 265-283, *Challenges in African Hydrology and Water Resources Planning.* IAHS Publication 144. Wallingford. UK.
9. **Walling D E and Webb B W.** 1996. *Erosion and sediment yield: global and regional perspectives.* IAHS Publication 236. Wallingford. UK.
10. **Morris G L and Fan J.** 1997. *Reservoir Sedimentation Handbook.* McGraw-Hill. New York. ISBN 0 07 043302 X.
11. **Mahmood K.** 1987. *Reservoir sedimentation: impact, extent and mitigation.* World Bank. Technical Paper No. 71. ISSN 0253 7494. ISBN 0 8213 0952 8.
12. **Palmieri A, Shah F and Dinar A.** 1998. *Reservoir sedimentation and the sustainable management of dams.* World Congress of Environmental and Resource Economists, Venice, June 23-27.
13. **Palmieri A, Shah F, Annandale G W and Dinar A.** 2003. *Reservoir Conservation: Volume 1 The RESCON Approach, Volume 2 RESCON Model and User Manual.* The International Bank for Reconstruction and Development / The World Bank, Washington D.C.
14. **World Commission on Dams.** 2000. *Dams and Development: A New Framework for Decision-Making.* Earthscan Publications Ltd. ISBN 1 85383 797 0.

Review of Current Knowledge

15. **Intergovernmental Panel on Climate Change (IPCC)**. 2007. *Climate Change 2007: Synthesis Report*. Available on-line at: www.ipcc.ch/ipccreports.
16. **European Project for Ice Coring in Antarctica (EPICA)**. Data available on-line at: www.esf.org.
17. **National Oceanic and Atmospheric Administration (NOAA)**. Data available on-line at: www.noaa.gov.
18. **UK Meteorological Office: Hadley Centre**. Data available on-line at: www.metoffice.gov.uk/climatechange/science/hadleycentre.

Review of Current Knowledge

Appendix

Regional Distribution of Countries

Asia

Armenia	Georgia	Korea, South	Nepal	Tajikistan
Azerbaijan	India	Kyrgyzstan	Pakistan	Thailand
Bangladesh	Indonesia	Lao	Philippines	Turkmenistan
Bhutan	Japan	Malaysia	Singapore	Uzbekistan
Cambodia	Kazakhstan	Mongolia	Sri Lanka	Vietnam
China	Korea, North	Myanmar	Taiwan	

Europe

Albania	Czech Rep	Iceland	Netherlands	Slovenia
Austria	Denmark	Ireland	Norway	Spain
Belarus	Estonia	Italy	Poland	Sweden
Belgium	Finland	Latvia	Portugal	Switzerland
Bosnia & Herzegovina	France	Lithuania	Romania	Ukraine
Bulgaria	Germany	Luxemburg	Russia	UK
Croatia	Greece	Montenegro	Serbia	
Cyprus	Hungary	Moldova	Slovakia	

Middle East and North

Africa

Afghanistan	Iraq	Lebanon	Saudi Arabia	UAE
Algeria	Israel	Libya	Syria	Yemen
Egypt	Jordan	Morocco	Tunisia	
Iran	Kuwait	Oman	Turkey	

Sub-Saharan

Africa

Angola	Congo Dem. Rep.	Guinea Bissau	Namibia	Sudan
Benin	Côte d'Ivoire	Kenya	Niger	Swaziland
Botswana	Equatorial Guinea	Lesotho	Nigeria	Tanzania
Burkina Faso	Eritrea	Liberia	Rwanda	Togo
Burundi	Ethiopia	Madagascar	Senegal	Uganda
Cameroon	Gabon	Malawi	Seychelles	Zambia
Central African Rep.	Gambia	Mali	Sierra Leone	Zimbabwe

Review of Current Knowledge

Chad	Ghana	Mauritania	Somalia
Congo	Guinea	Mozambique	South Africa

North America

Canada	United States
--------	---------------

Central America and Caribbean

Belize	Dominican Rep.	Haiti	Mexico	Trinidad & Tobago
Costa Rica	El Salvador	Honduras	Nicaragua	
Cuba	Guatemala	Jamaica	Panama	

South America

Argentina	Chile	Guyana	Suriname
Bolivia	Colombia	Paraguay	Uruguay
Brazil	Ecuador	Peru	Venezuela

Oceania

Australia	Fiji	New Zealand	Papua New Guinea	Solomon Islands
-----------	------	-------------	------------------	-----------------